


How to change the door for D-Storm case.


1. Use small size flat-head screw drive to push down the spring in the middle.



2. Hold the spring down and use another screw drive to push down the hinge.

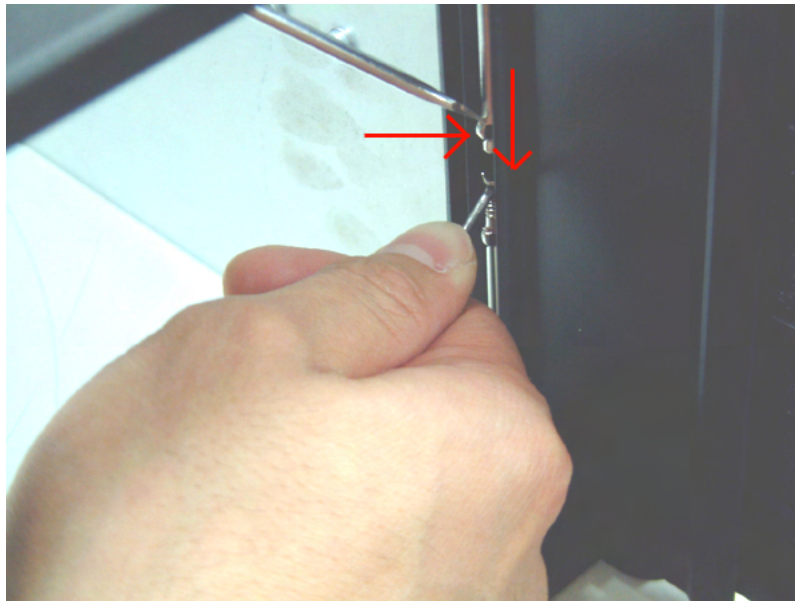

3. Pull the door out. **Please be careful**, sometime the hinge will just off and could hit your eyes.

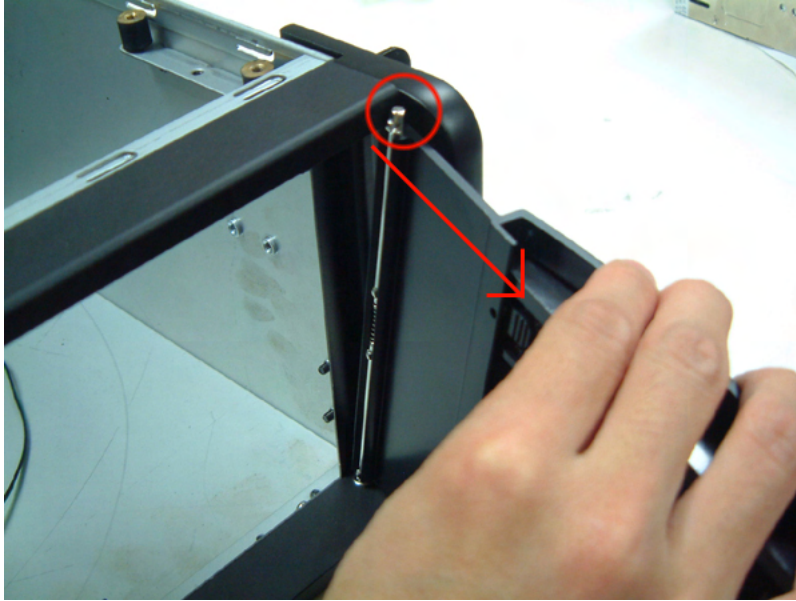


4. Take the hinges and the spring out from the trench. Please notice that there is a ring on bottom of the hinge.




5. Put the spring and the hinge to the door that you want to install.




6. Put the ring on the bottom just right on top of the hole.

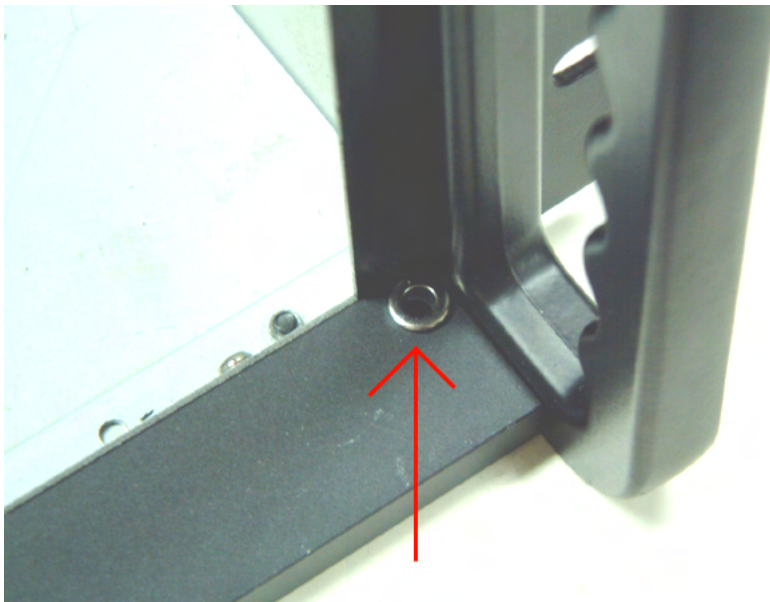

7. Put the hinge in the hole through the ring.

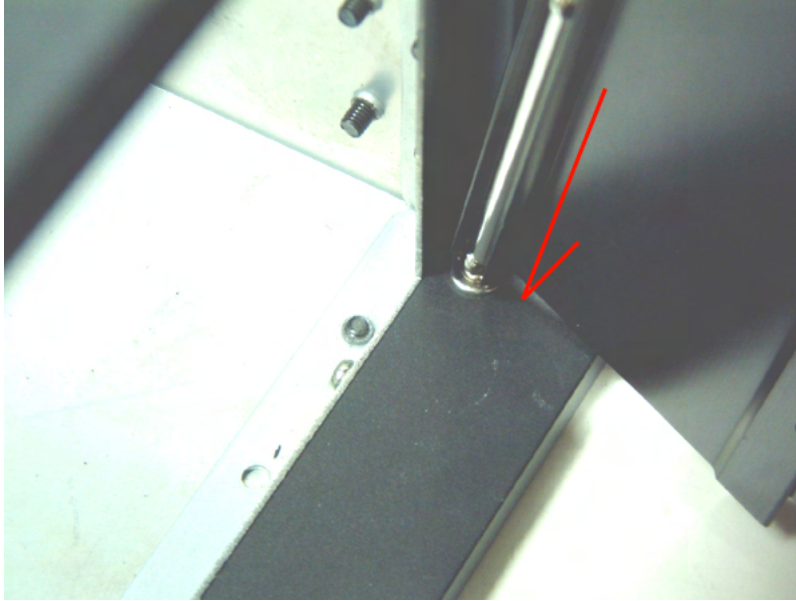

8. Push the top of the hinge and push it into the lockup position. You should hear a click sound if the hinge falls into the right position.

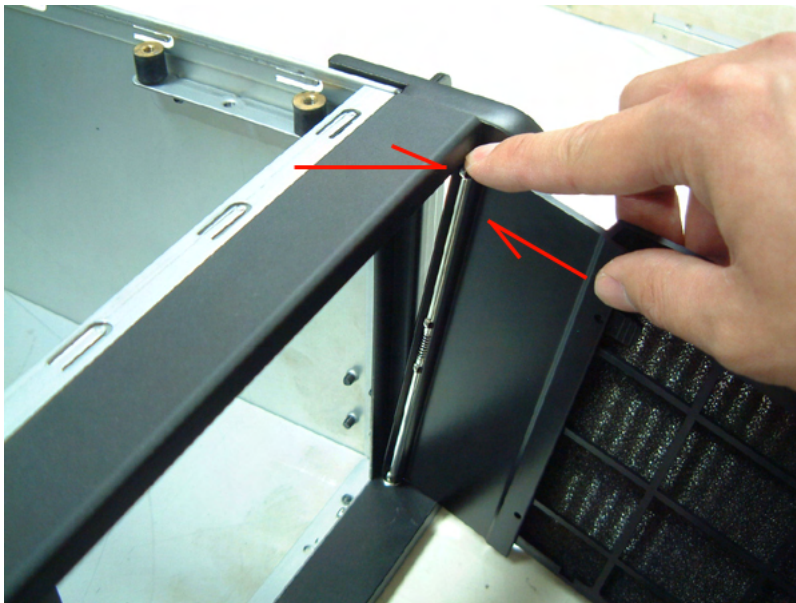

9. Make sure the door is secured and locked up in the holes.

