

BPU-124DE-SS

5.25" to 4x 2.5" SATA SAS 6 Gbps
HDD SSD Hot-swap Rack




Features

- High Performance Transfer Rate Up to 6.0 Gb/s
- All Aluminum Material Solid Construction
- Plug & Play, Hot Swappable
- Built-In 2 x 40mm Cooling Fans
- LEDs for Power & HDD Activity
- Supports 4 x 2.5" SAS I/II (Primary Channel) and SATA I/II/III HDDs
- Support HDD Thickness up to 15 mm

Specifications

Model Number	Color of Main Chassis		
BPU-124DE-SS	Black		
RoHS Compliance	Cooling Fan		
YES	2x40mm		
Standard Drive Bays	Dimensions (WxHxD)		
Hotswap 2.5": 4	Width	5.75" (146.0 mm)	
5.25" Drives: 1	Height	1.65" (41.9 mm)	
Hotswap HDD Type:	Depth	7.09" (180.1 mm)	
2.5" SAS I/II & SATA I/II/III			
Indicators			
Blue:power on./ Fast Red Blinking:overheating./ Slow Red Blinking:fan failure			
Security			
Key Lock			
Material of Main Chassis			
Aluminum			

Front View

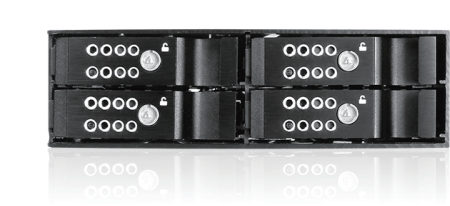

Feature View




Rear View




*SSD not included

We at iStarUSA Group offer OEM/ODM services for Industrial Power, Custom Power, Chassis, Cabinets, and Data Storage. Through our skilled metal bending, milling, and silk screening we can provide you with unique customizations that will make your product stand out from the rest. With iStarUSA Group's OEM/ODM Solutions you can be sure to receive one-of-a-kind products for your one-of-a-kind business.

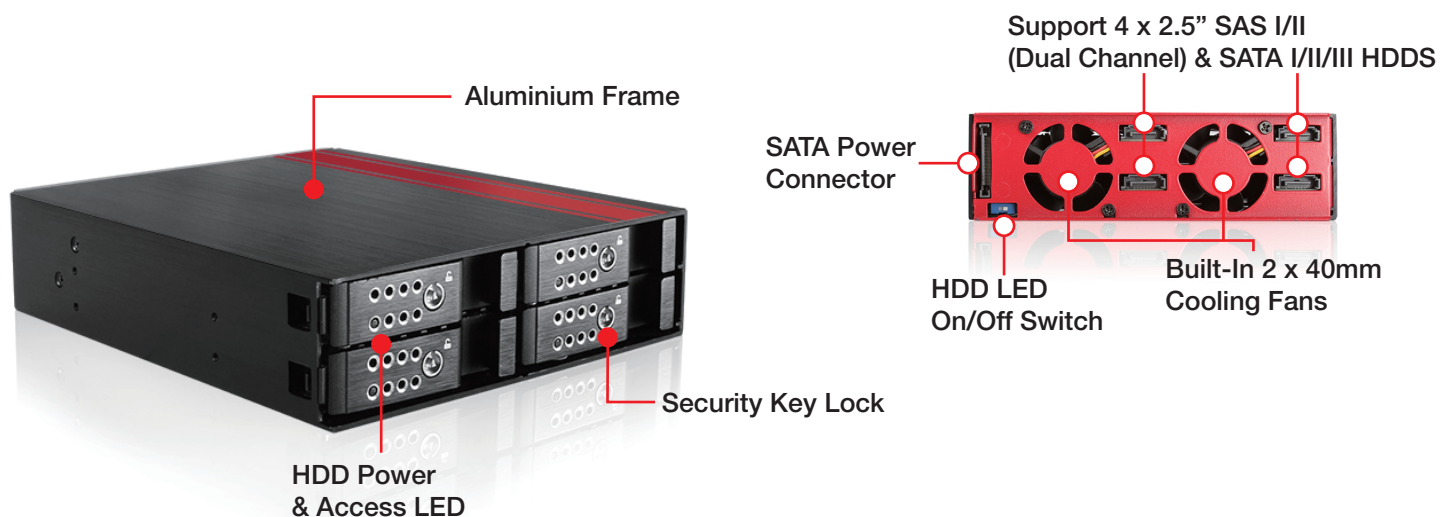

Dimensions

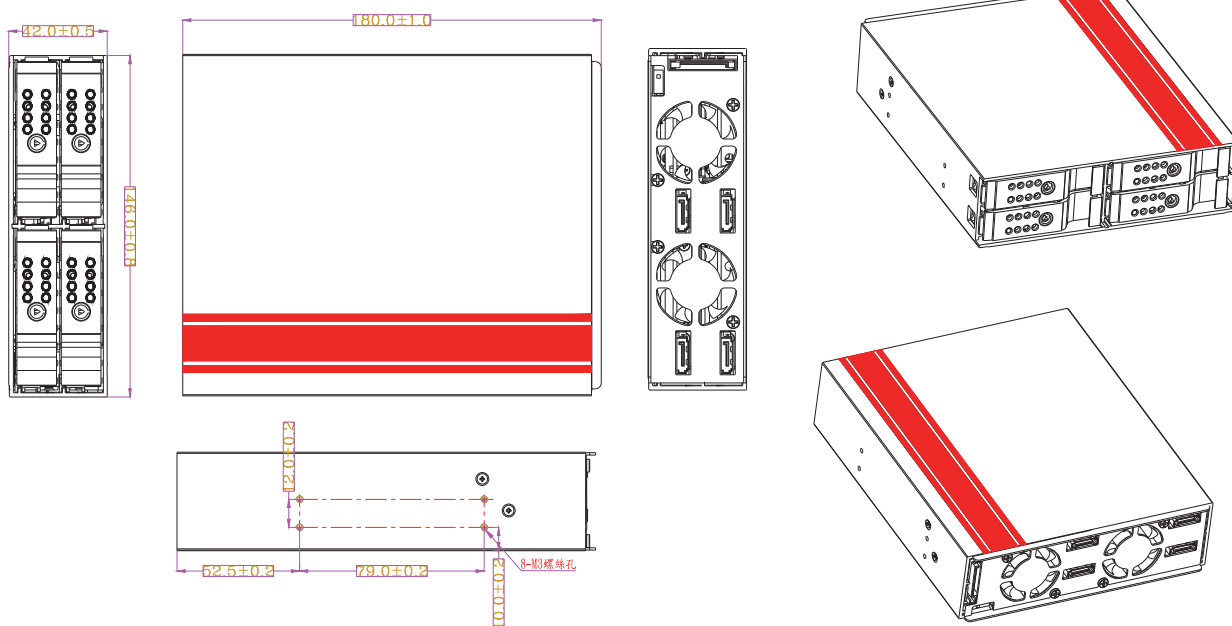

Ordering Information

Model	Description
BPU-124DE-SS	5.25" to 4x 2.5" SATA SAS 6 Gbps HDD SSD Hot-swap Rack