

# BPN-2535DE-SA

3.5" to 2x 2.5" SATA 6 Gbps HDD SSD  
Hot-swap Rack



## Features

- Aluminum Housing
- Compatible with SATA III (Transfer rate 6.0 Gb/s)
- Fit one 3.5" Drive Bay for 2 x 2.5" Standard HDDs or SSDs (thickness 9.5mm)
- With one SATA Power and two DATA Connectors
- Energy Saving on Using 2.5" HDDs or SSDs
- LED Indicators for Power & HDD access
- Security Key Lock
- RoHS Compliance
- JBOD Support (two individual hard drives)

## Specifications

Model Number	Color of Main Chassis	
BPN-2535DE-SA	Black	
RoHS Compliance	Dimensions (WxHxD)	
YES	Width	4.00" ( 101.6 mm )
	Height	1.00" ( 25.4 mm )
	Depth	5.74" ( 145.8 mm )
Standard Drive Bays		
Hotswap 2.5": 2		
3.5" Drives: 1		
Hotswap HDD Type:		
2.5" SATA I/II/III		
Indicators		
Power and HDD access		
Security		
Key Lock		
Material of Main Chassis		
Aluminum		

## Front View



## Feature View




## Rear View




\*SSD not included

We at iStarUSA Group offer OEM/ODM services for Industrial Power, Custom Power, Chassis, Cabinets, and Data Storage. Through our skilled metal bending, milling, and silk screening we can provide you with unique customizations that will make your product stand out from the rest. With iStarUSA Group's OEM/ODM Solutions you can be sure to receive one-of-a-kind products for your one-of-a-kind business.

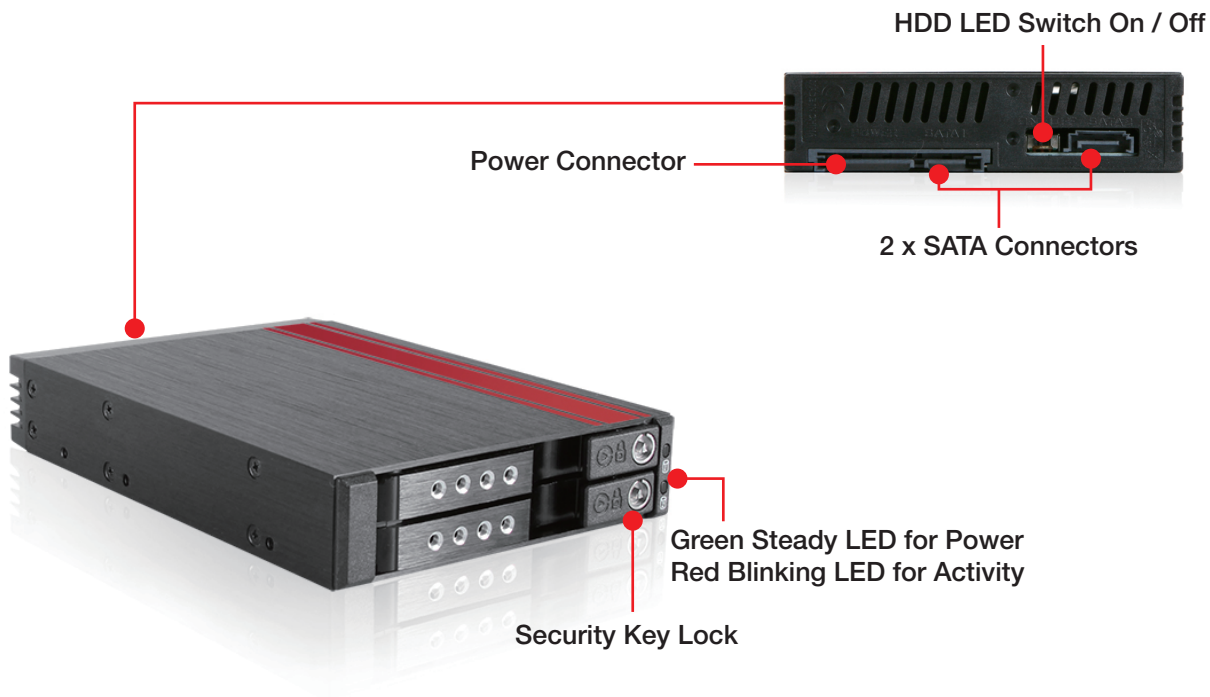

## Dimensions

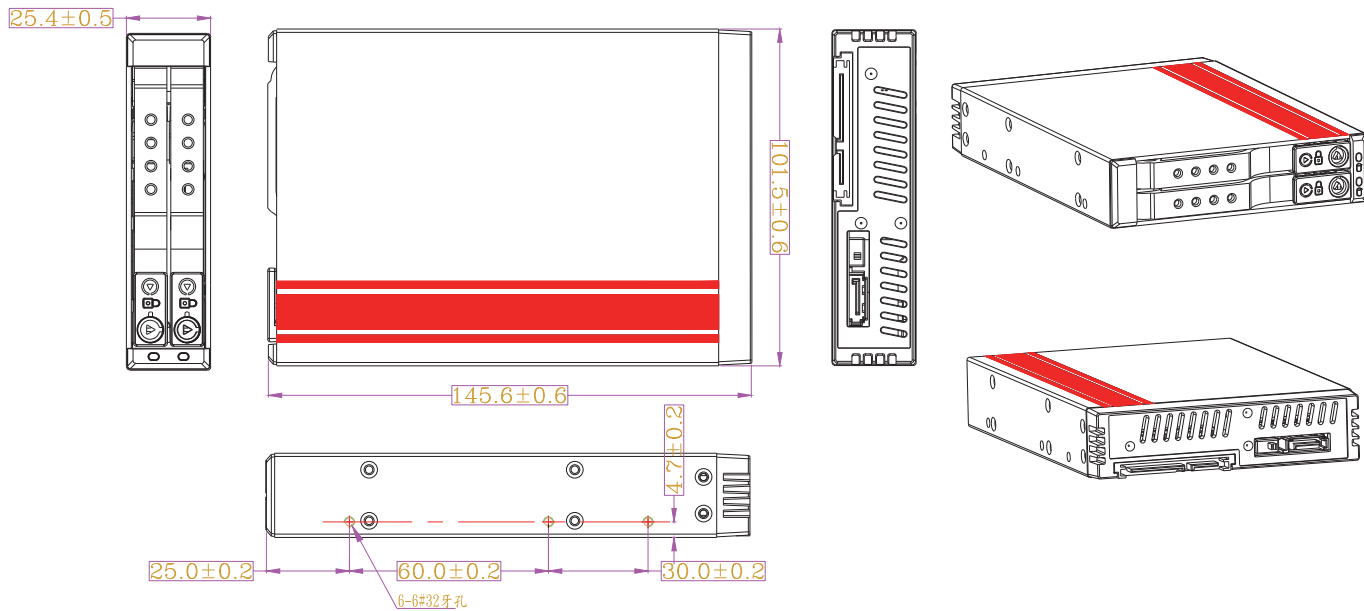

## Ordering Information

Model	Description
BPN-2535DE-SA	3.5" to 2x 2.5" SATA 6 Gbps HDD SSD Hot-swap Rack