

# BPU-228DE-SS

2x 5.25" to 8x 2.5" SATA SAS 6 Gbps  
HDD SSD Hot-swap Rack



## Features

- High Performance Transfer Rate Up to 6.0 Gb/s
- All Aluminum Material Solid Construction
- Plug & Play, Hot Swappable
- Built-in 70mm Cooling Fan
- LEDs for Power & HDD Activity
- Supports 8x 2.5" SAS I/II (Primary Channel) and SATA I/II/III HDDs/SSDs
- Support HDD Thickness up to 14.5 mm

## Specifications

Model Number	Cooling Fan	
BPU-228DE-SS	1x70mm	
RoHS Compliance	Dimensions (WxHxD)	
YES	Width	5.75" ( 146.0 mm )
	Height	3.35" ( 85.1 mm )
	Depth	6.30" ( 160.0 mm )
Standard Drive Bays		
Hotswap 2.5": 8		
5.25" Drives: 2		
Hotswap HDD Type:		
Blue:power on./ Fast Red Blinking:overheating./ Slow Red Blinking:fan failure		
Security		
Key Lock		
Material of Main Chassis		
Aluminum		
Color of Main Chassis		
Black		

## Front View





## Feature View




## Rear View



We at iStarUSA Group offer OEM/ODM services for Industrial Power, Custom Power, Chassis, Cabinets, and Data Storage. Through our skilled metal bending, milling, and silk screening we can provide you with unique customizations that will make your product stand out from the rest. With iStarUSA Group's OEM/ODM Solutions you can be sure to receive one-of-a-kind products for your one-of-a-kind business.

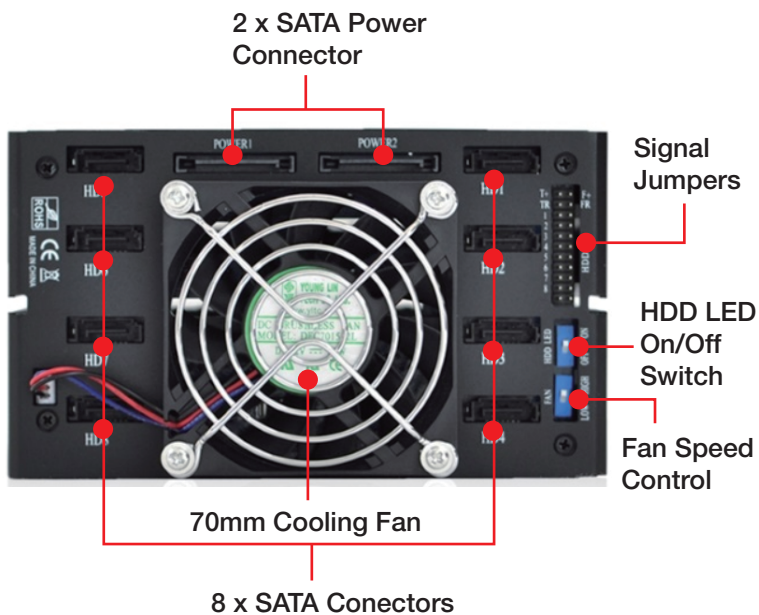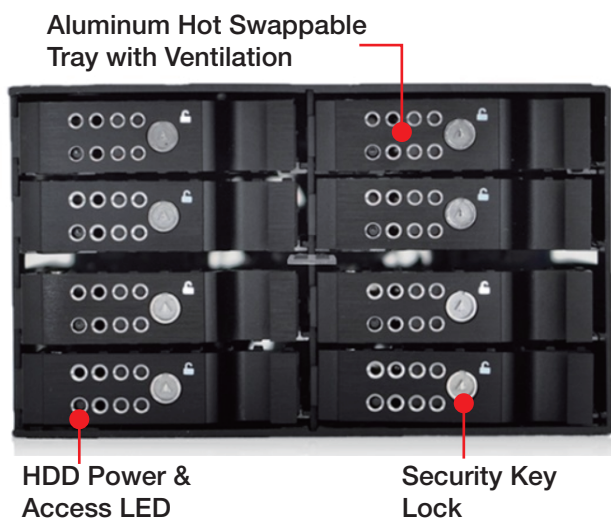

## Dimensions

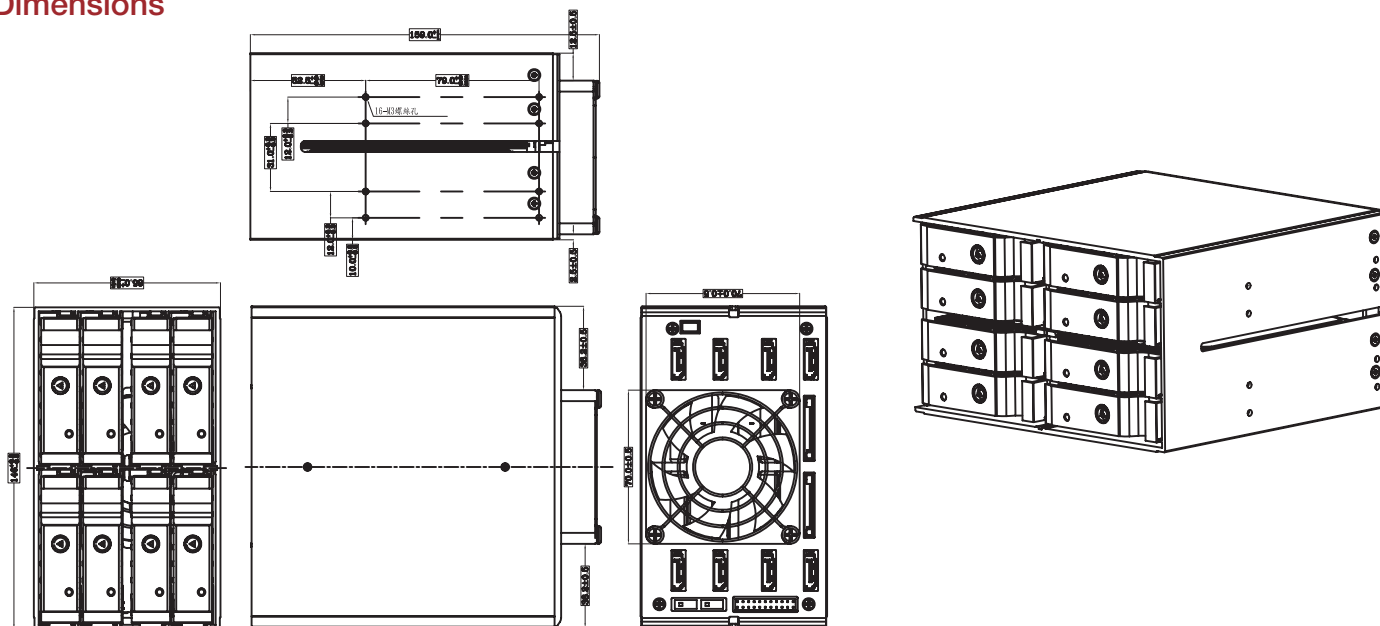

## Ordering Information

Model	Description
BPU-228DE-SS	2x 5.25" to 8x 2.5" SATA SAS 6 Gbps HDD SSD Hot-swap Rack