

D2-300L-M6SA

3U 6 Hot-Swappable Rackmount Chassis



Features

- Front Access USB2.0 x2
- 80mm x5 cooling fan
- Power and HDD LED
- Power and Alarm Reset Switch
- 6 Hot-Swappable SATA II Drive Bay

Specifications

Model Number	Switches	Color of Front Bezel	Dimensions (WxHxD)	
D2-300L-M6SA	Power ON/OFF, System & Alarm Reset	Black	Width	19.00" (482.6 mm)
RoHS Compliance	Expansion Slots	Color of Main Chassis	Height	5.25" (133.3 mm)
YES	7	Black	Depth	27.10" (688.3 mm)
Form factor	Security	Front Connector		
3 U	Front Bezel	Front USB 2.0 x 2 Connector		
Standard Drive Bays	Material of Front Bezel	Air Filter		
Hotswap 3.5": 6 5.25" Drives: 2	Aluminum alloy	Removable & Washable		
Hotswap HDD Type:	Material of Handle	Motherboard Size		
3.5" SAS I/II & SATA I/II/III	SECC Zinc-Coated Steel	12 x 13 (EATX, ATX, microATX)		
Indicators	Material of Main Chassis	Cooling Fan		
Power, HDD, Temperature, Fan	1.2mm SECC Zinc-Coated Steel (Japan Made)	2x60mm, 3x80mm		

Front View



Inside View




Rear View



We at iStarUSA Group offer OEM/ODM services for Industrial Power, Custom Power, Chassis, Cabinets, and Data Storage. Through our skilled metal bending, milling, and silk screening we can provide you with unique customizations that will make your product stand out from the rest. With iStarUSA Group's OEM/ODM Solutions you can be sure to receive one-of-a-kind products for your one-of-a-kind business.

Dimensions

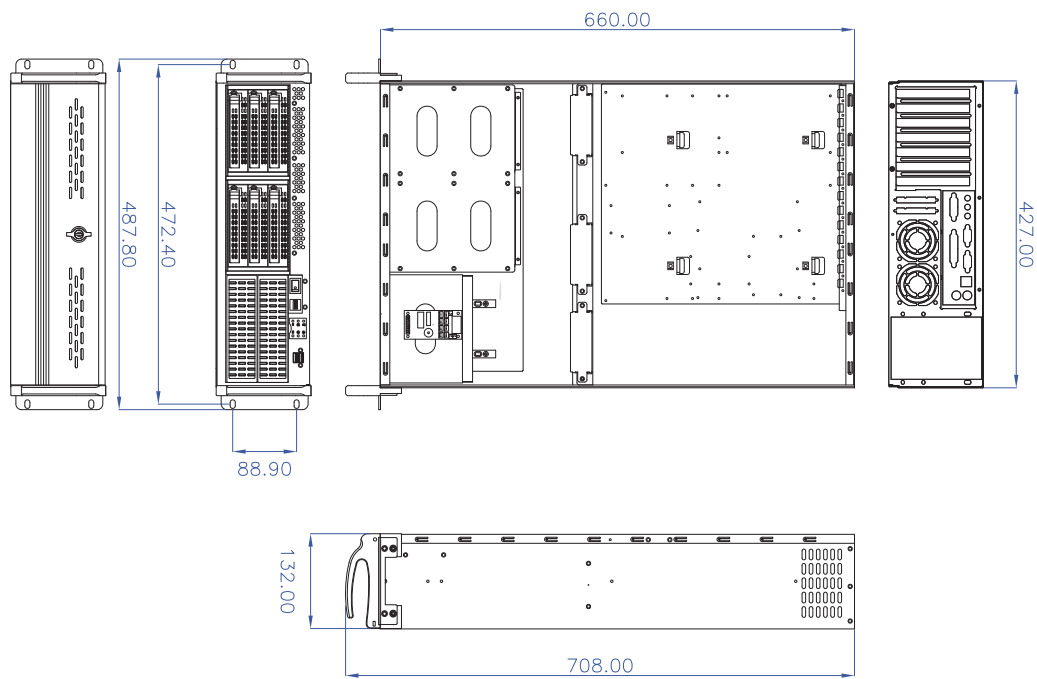

Ordering Information

Model	Description
D2-300L-M6SA	3U 6 Hot-Swappable Rackmount Chassis

Compatible Power

PSU Model	Description
IX-550R2UPD8	550W 2U High Efficiency Redundant Power Supply
IX-750S2UPD8G	750W 2U High Efficiency Redundant Power Supply

Optional Accessories

Category	Model
Drive Cage	BPN Trayless Drive Cage Series BPU Tray Drive Cage Series
Sliding Rail Kit	TC-RAIL Series Sliding Rail Kit