

Features

- · Fiber Optical Drive Tray Status Indicator
- · Advance Thermal Cooling Design Optimizes Airflow
- 3 Cooling Fans with Status Monitor
- Support EATX Motherboard
- HD miniSAS (SFF-8643) HDD Backplane
- Front Access USB Connector
- Power + Fan Failure + HDD LED Indicator
- Power/Alarm Reset Switch
- Fully RoHS Compliance
- Supports Both 2.5" and 3.5" SAS I/II/III and SATA I/II/III HDD/SSD
- High Performance Transfer Rate up to 12Gb/s

Specifications

Model Number	Supported PSU Type	Dimension	s (WxHxD)	
E4M24HD	ATX, 2U and Mini Redundant	Width Height Depth	19.00" (482.6 mm) 7.00" (177.8 mm) 27.00" (685.8 mm)	
RoHS Compliance	Expansion Slots	Берш	27.00 (003.011111)	
YES	7			
Form factor	Material of Handle			
4 U	Aluminum			
Standard Drive Bays	Material of Main Chassis			
2.5" Drive (internal): 2	Heavy-duty SGCC Cold-rolled Steel			
Hotswap 3.5": 24				
Hotswap HDD Type:	Front Connector			
2.5" & 3.5" SAS I/II/III & SATA I/II/III	1x USB 3.0			
Indicators	Motherboard Size			
Power + Fan Failure + HDD LED	12 x 13 (EATX, ATX, microATX)			
Switches	Cooling Fan			
Power On/Off, Reset, Mute	3x120mm			

Front View Inside View Rear View








We at iStarUSA Group offer OEM/ODM services for Industrial Power, Custom Power, Chassis, Cabinets, and Data Storage. Through our skilled metal bending, milling, and silk screening we can provide you with unique customizations that will make your product stand out from the rest. With iStarUSA Group's OEM/ODM Solutions you can be sure to receive one-of-a-kind products for your one-of-a-kind business.



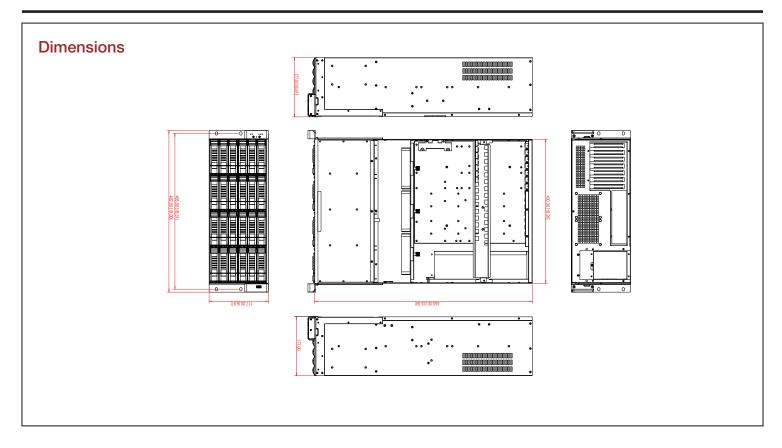

Ordering Information

Model	Description
E4M24HD	4U 24-Bay Storage Server Rackmount Chassis
	12Gb/s HDD SSD SFF-8643 Backplane

Compatible Power

PSU Model	Description
IS-1000R3NP	4U Redundant PSU
IX-1600R2UPD8	2U 1600W 80+ Platinum Redundant
IX-750S2UPD8G	2U 750W 80+ Gold Redundant

Optional Accessories

Category	Model
Sliding Rail Kit	TC-RAIL Series Sliding Rail Kit