

IS-2000RH1UP

2000W 1U Redundant Power Supply



Features

- Universal Input, Active PFC
- MTBF > 100,000 Hours
- SCP (Short Circuit Protection)
- OCP (Over Current Protection)
- OVP (Over Voltage Protection)
- OPP (Over Power Protection)
- Power Failure Alarm & Signals
- Efficiency: 75% at Full Load
- Industrial Japanese Components 40 degrees temperature
- Automatic Fan Thermal Control

Specifications

Model Number	Efficiency
IS-2000RH1UP	75%
RoHS Compliance	Connector Type
YES	Main Connector :: 24 pin/ 4pin 12V :: 1/ 8pin EPS 12V :: 1/ Molex :: 30 SATA :: 2/ Floppy :: 7
Output Wattage	Dimensions (WxHxD)
2000	Width 16.61" (421.9 mm) Height 1.69" (42.9 mm) Depth 13.39" (340.1 mm)


Front View



Side View




Rear View

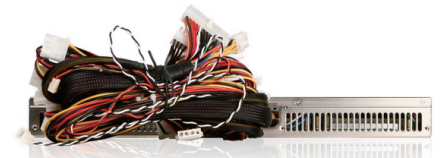

We at iStarUSA Group offer OEM/ODM services for Industrial Power, Custom Power, Chassis, Cabinets, and Data Storage. Through our skilled metal bending, milling, and silk screening we can provide you with unique customizations that will make your product stand out from the rest. With iStarUSA Group's OEM/ODM Solutions you can be sure to receive one-of-a-kind products for your one-of-a-kind business.

Dimensions

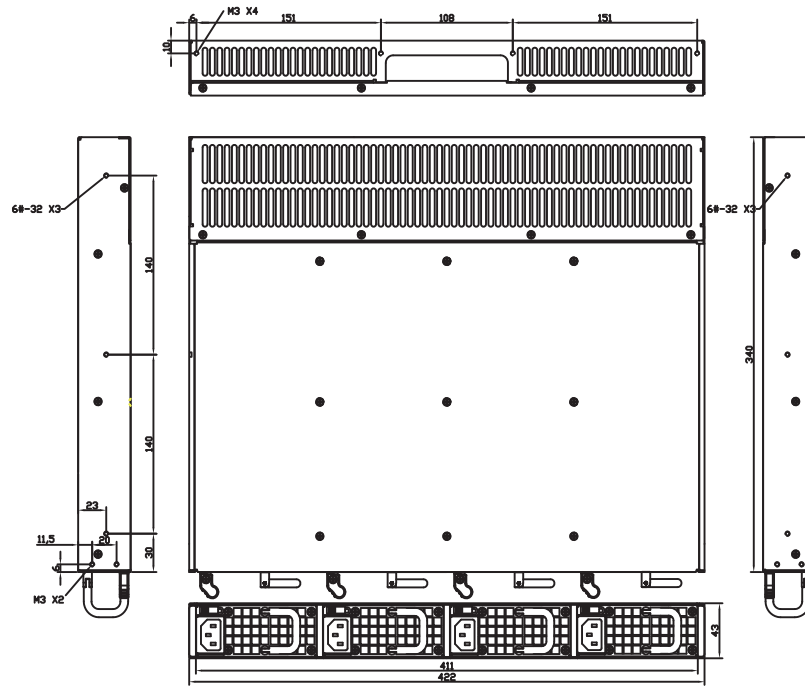

Compatible Chassis

* Please visit our website www.istarusa.com/en/xeal for a full list of compatible chassis

Output Rating

Output Voltage	+5V	+3.3V	+12V	-5V	-12V	+5VSB
Max. Load	60A	60A	158A	0.5A	0.8A	3A
Min. Load	1A	1A	2A	0A	0A	0.1A
Max. Combined	440W					
Total Output	1975W			2.5W	9.6W	15W