IS-2U46PD8

2U 460W 80 Plus High Efficiency Power Supply



Features

- 80 Plus High Efficiency and Reliability
- 16ms Hold Up Time
- Over Current Protection
- Over Voltage Protection
- Short Circuit Protection
- Low Noise and Thermal-controlled Fan

Specifications

Model Number	Efficiency
IS-2U46PD8	80%
RoHS Compliance	Connector Type
YES	Main Connector :: 24 pin/ 4pin 12V :: 1/ 8pin EPS 12V :: 1/ Molex :: 4 SATA :: 2/ Floppy :: 1
Output Wattage	Dimensions (WxHxD)
460	Width 3.94" (100.1 mm) Height 2.76" (70.1 mm) Depth 7.87" (199.9 mm)

Front View

Side View


Rear View



We at iStarUSA Group offer OEM/ODM services for Industrial Power, Custom Power, Chassis, Cabinets, and Data Storage. Through our skilled metal bending, milling, and silk screening we can provide you with unique customizations that will make your product stand out from the rest. With iStarUSA Group's OEM/ODM Solutions you can be sure to receive one-of-a-kind products for your one-of-a-kind business.



IS-2U46PD8

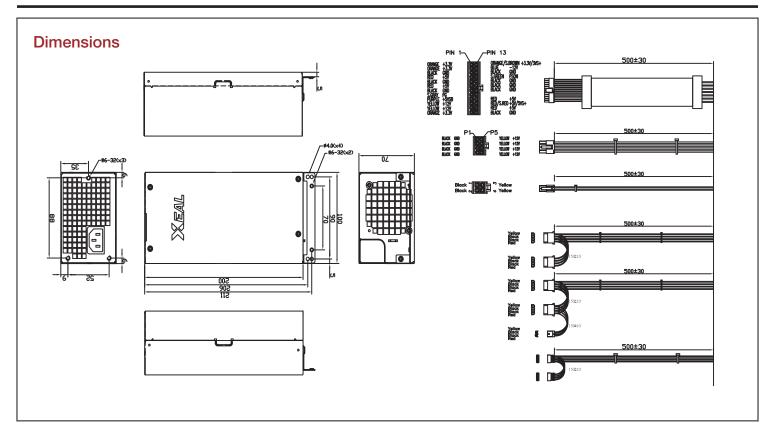

Compatible Chassis

 * Please visit our website www.istarusa.com/en/xeal for a full list of compatible chassis

Output Rating

Output Voltage	+5V	+3.3V	+12V (Single Rail)	-12V	+5VSB		
Max. Load	20A	20A	38A	0.8A	3A		
Min. Load	0.5A	0.5A	1A	0A	0A		
Max. Combined	130W		456W	6W	15W		
Total Output	460W						



727 Phillips Drive, City of Industry, CA 91748 United States of America Tel: 1-888-989-1189 (Toll-free) Fax: 1-626-301-0588 Sales@istarusa.com

www.istarusa.com iStarUSA, All Rights Reserved