

# IS-880PD8

## 880W PS2 ATX High Efficiency Switching Power Supply




### Features

- Universal Input, Active PFC
- High Efficiency 80% minimum
- Industrial Japanese Components 40 degrees temperature
- Industrial DIN-Connector for Reliability
- Remote Sensor on +5V & +3.3V
- OVP (Over Voltage Protection)
- OCP (Over Current Protection)
- SCP (Short Circuit Protection)
- MTBF > 100,000 Hours

### Specifications

<b>Model Number</b>	<b>Efficiency</b>
IS-880PD8	80%
<b>RoHS Compliance</b>	<b>Connector Type</b>
YES	Main Connector :: 24 pin/ 4pin 12V :: 1/ 8pin EPS 12V :: 1/ Molex :: 6 SATA :: 6/ Floppy :: 2/ 8pin PCIE :: 1
<b>Output Wattage</b>	<b>Dimensions (WxHxD)</b>
880	Width            5.91" ( 150.1 mm ) Height           3.39" ( 86.1 mm ) Depth            7.48" ( 190.0mm )


### Front View

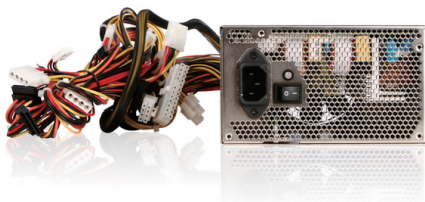

### Side View




### Rear View

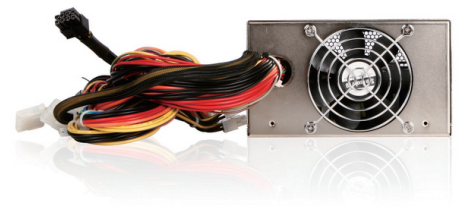

We at iStarUSA Group offer OEM/ODM services for Industrial Power, Custom Power, Chassis, Cabinets, and Data Storage. Through our skilled metal bending, milling, and silk screening we can provide you with unique customizations that will make your product stand out from the rest. With iStarUSA Group's OEM/ODM Solutions you can be sure to receive one-of-a-kind products for your one-of-a-kind business.

**Dimensions**

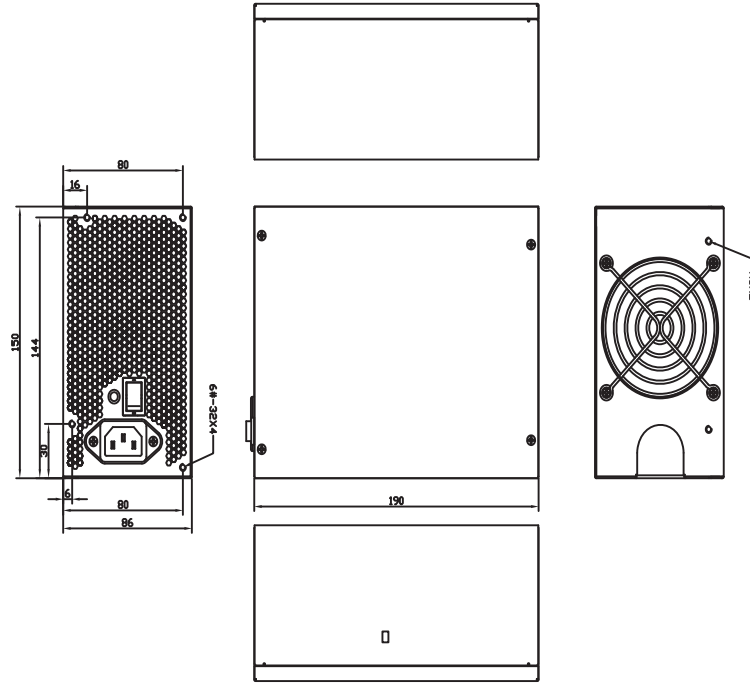

**Compatible Chassis**

\* Please visit our website [www.istarusa.com/en/xeal](http://www.istarusa.com/en/xeal) for a full list of compatible chassis

**Output Rating**

Output Voltage	+5V	+3.3V	+12V (Single Rail)	-12V	+5VSB
Max. Load	30A	28A	72A	0.5A	4A
Min. Load	1.0A	0A	3A	0A	0.1A
Max. Combined	180W		72A		
Total Output	860W			6W	20W