


# IS-900R2UPD8G

## 900W 2U 80+ Gold Redundant Power Supply

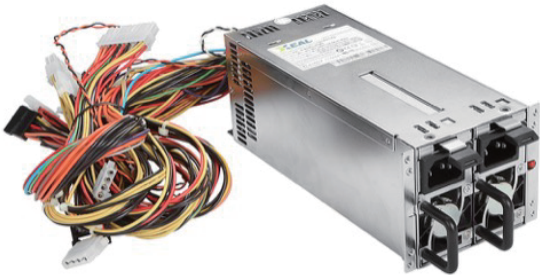


### Features

- Universal Input, Active PFC
- MTBF > 200,000 Hours
- Power Failure Alarm & Signals
- High Efficiency 88% minimum
- OPP (Over Power Protection)
- OVP (Over Voltage Protection)
- OCP (Over Current Protection)
- SCP (Short Circuit Protection)

### Specifications

<b>Model Number</b>	<b>Efficiency</b>
IS-900R2UPD8G	88%
<b>RoHS Compliance</b>	<b>Connector Type</b>
YES	Main Connector :: 20+4 pin/ 4pin 12V :: 1/ 8pin EPS 12V :: 2/ Molex :: 8 SATA :: 4/ Floppy :: 2
<b>Output Wattage</b>	<b>Dimensions (WxHxD)</b>
900	Width            3.23" ( 82.0 mm ) Height           3.31" ( 84.1 mm ) Depth            8.54" ( 216.9mm )


### Front View



### Side View




### Rear View

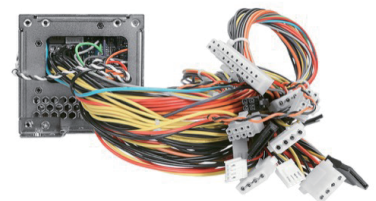

We at iStarUSA Group offer OEM/ODM services for Industrial Power, Custom Power, Chassis, Cabinets, and Data Storage. Through our skilled metal bending, milling, and silk screening we can provide you with unique customizations that will make your product stand out from the rest. With iStarUSA Group's OEM/ODM Solutions you can be sure to receive one-of-a-kind products for your one-of-a-kind business.

## Dimensions

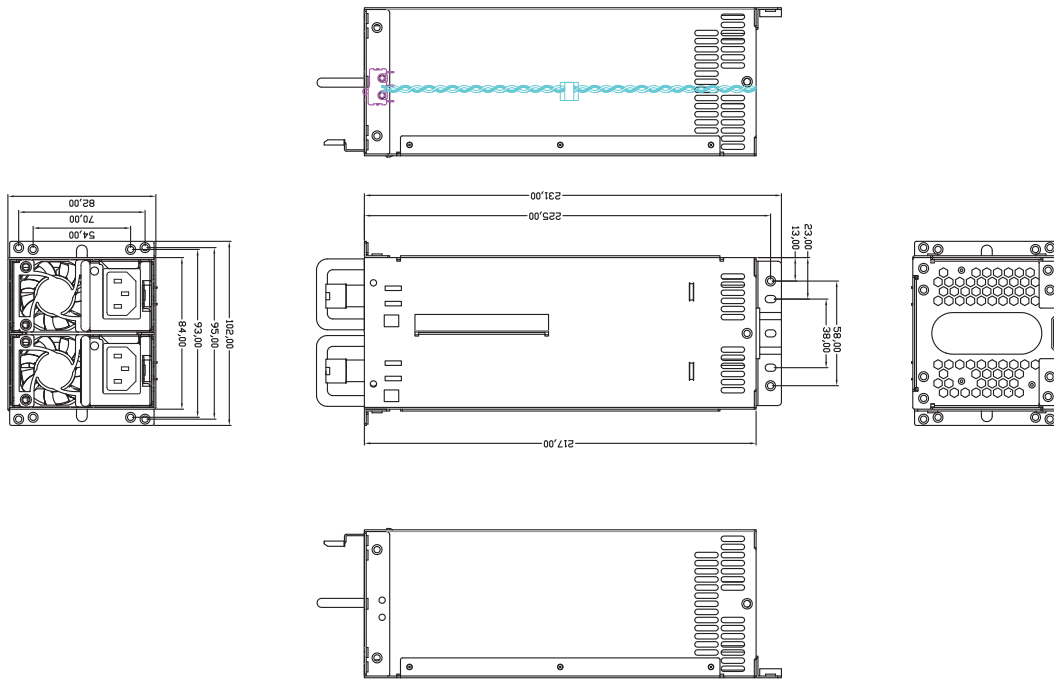

## Compatible Chassis

\* Please visit our website [www.istarusa.com/en/xeal](http://www.istarusa.com/en/xeal) for a full list of compatible chassis

## Output Rating

Output Voltage	+5V	+3.3V	+12V	-12V	+5VSB
Max. Load	25A	25A	75A	0.8A	3.5A
Min. Load	1A	1A	1A	0A	0.1A
Max. Combined	170W			9.6W	17.5W
Total Output	900W				