

IX-650RSH1UP8G

650W 1U High Efficiency Redundant Power Supply



- Features
- Universal Input, Active PFC
 - High Efficiency 87% minimum
 - PMBus Support
 - Over Temperature Protection (OTP)
 - Over Current Protection (OCP)
 - Over Voltage Protection (OVP)
 - Short Circuit Protection
 - MTBF > 100,000 Hours
 - Power Failure Alarm & Signals

Specifications

Model Number	Efficiency
IX-650RSH1UP8G	80%
RoHS Compliance	Connector Type
YES	Main Connector 24 pin :: 1 / PCIE 6+2 :: 2 / 8pin EPS 12V :: 1 / Molex :: 4 SATA :: 2 / Floppy :: 1
Output Wattage	Dimensions (WxHxD)
650	Width 4.17" (105.9 mm) Height 1.63" (41.4 mm) Depth 13.98" (355.1 mm)


Front View



Side View




Rear View

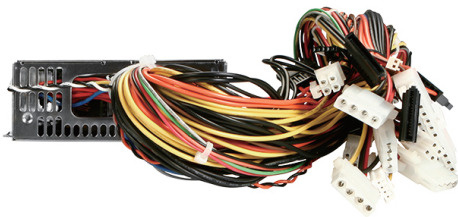

We at iStarUSA Group offer OEM/ODM services for Industrial Power, Custom Power, Chassis, Cabinets, and Data Storage. Through our skilled metal bending, milling, and silk screening we can provide you with unique customizations that will make your product stand out from the rest. With iStarUSA Group's OEM/ODM Solutions you can be sure to receive one-of-a-kind products for your one-of-a-kind business.

Dimensions

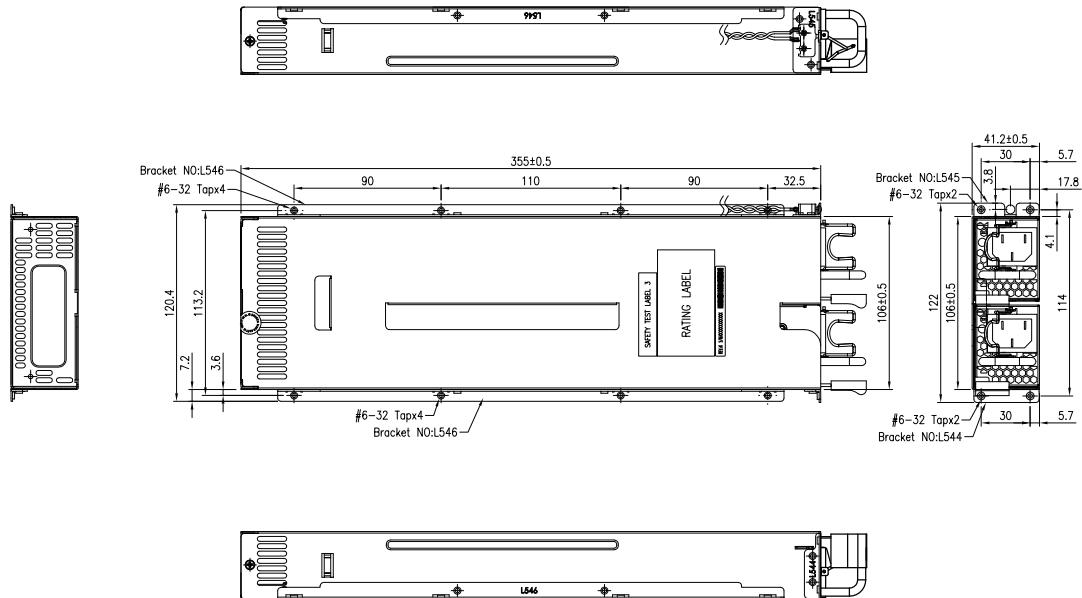

Compatible Chassis

* Please visit our website www.istarusa.com/en/xeal for a full list of compatible chassis

Output Rating

Voltage	Minimum Load	Maximum Continuous Load
+3.3V	0.5A	24A
+5V	0.5A	24A
+12V	1A	53A
-12V	0A	0.5A
+5VSB	0.1A	3A