

Installation Guide

Major Components

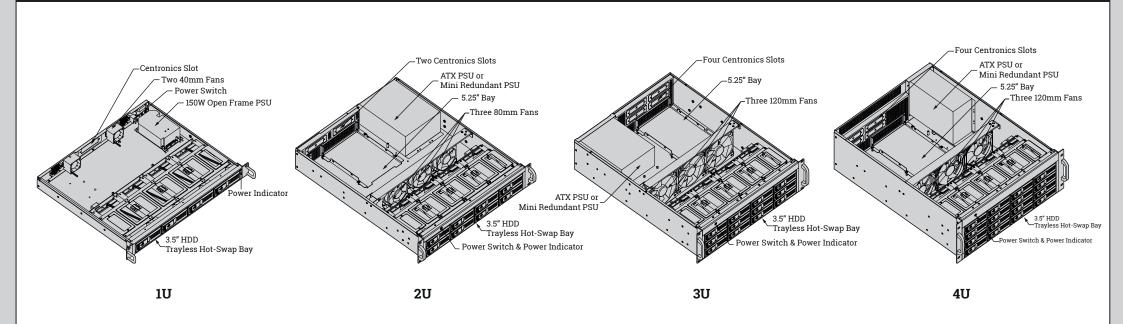


Centronics Bridge Card Assembly

- 1. Remove Centronics cover
- 2. Install Centronics bridge card
- 3. Tighten M3 screws to secure Centronics bridge card

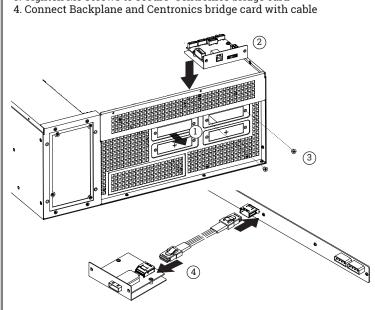


5.25" Bay Assembly

- 1. Loose 4 screws on the top to take out the drive cage
- 2. Loose screws on both sides to remove 5.25" bay covers
- 3. Tighten M3 screws to secure 5.25" devices



ATX PSU/ Mini Redundant PSU Assembly



- 1. Loose 4 screws on the PSU bracket
- 2. Remove the PSU bracket
- 3. Tighten #6-32 screws to secure mini redunant PSU

