


Installation Guide

Major Components

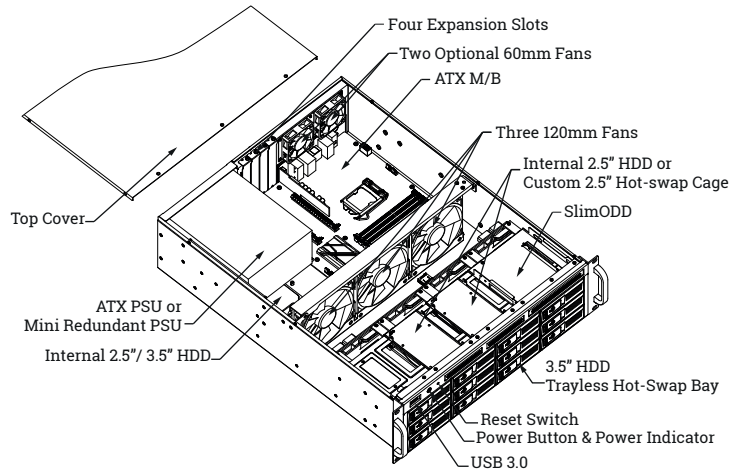


2.5" / 3.5" HDD Assembly

• Internal 2.5" HDD


1. Loose 3 screws on the top to take out the 2.5" bay bracket
2. Tighten M3 screws to secure 2.5" HDD

• Internal 2.5" HDD

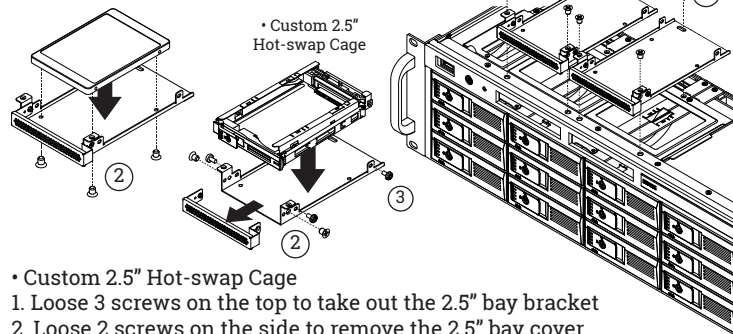

• Custom 2.5" Hot-swap Cage

1. Loose 3 screws on the top to take out the 2.5" bay bracket
2. Loose 2 screws on the side to remove the 2.5" bay cover
3. Tighten M2.5 screws to secure custom 2.5" hot-swap cage

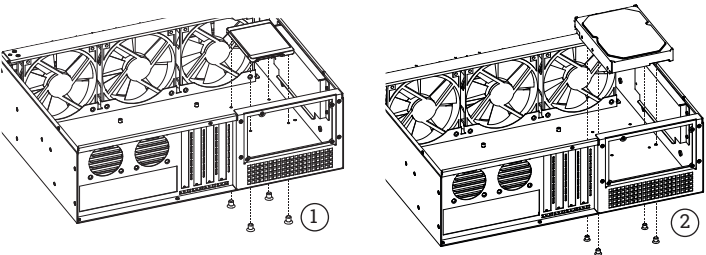


• Internal 2.5" / 3.5" HDD

1. Tighten M3 screws to secure 2.5" HDD
2. Tighten #6-32 screws to secure 3.5" HDD


Slim ODD Assembly

1. Loose 2 screws on the top to take out the slim ODD bracket
2. Loose 2 screws on both sides to remove slim ODD cover
3. Insert slim ODD into the bracket
4. Tighten M2 screws to secure slim ODD

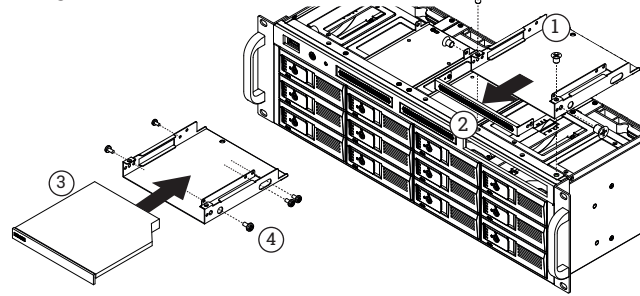


Rear 60 mm Fan Assembly

1. Tighten T5 screws to secure 60mm fans

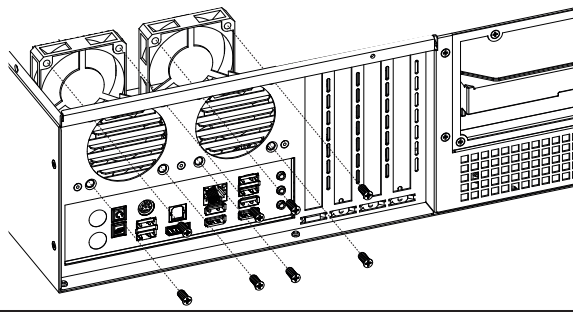


ATX M/B Assembly

1. Place standoffs to desired locations before installing M/B
2. Tighten M3 screws to secure M/B

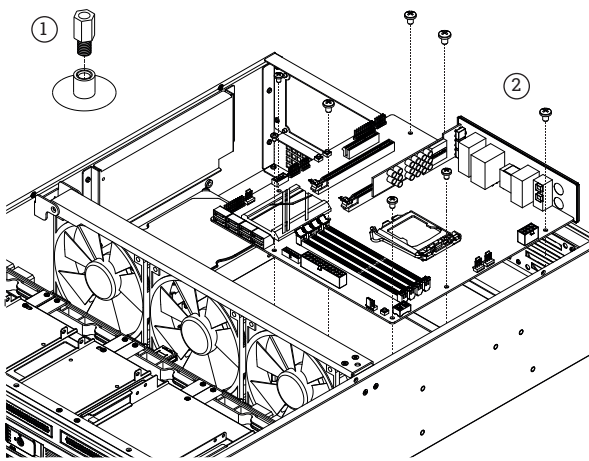


Expansion Card Assembly

1. Tighten #6-32 screws to secure add-on cards

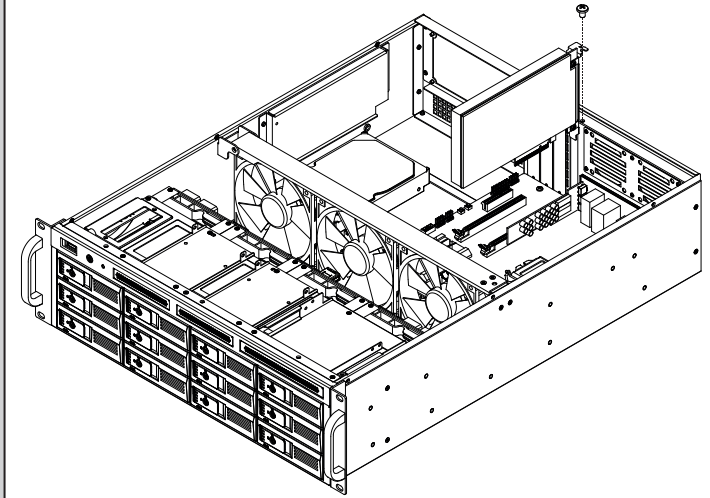

ATX PSU Assembly

1. Tighten #6-32 screws to secure PSU

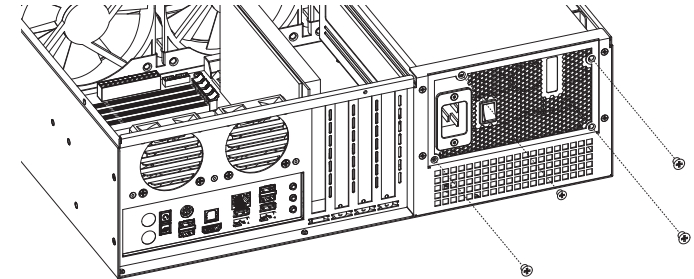

Mini Redundant PSU Assembly

1. Loose 4 screws on the PSU bracket
2. Remove the PSU bracket
3. Tighten #6-32 screws to secure PSU

