
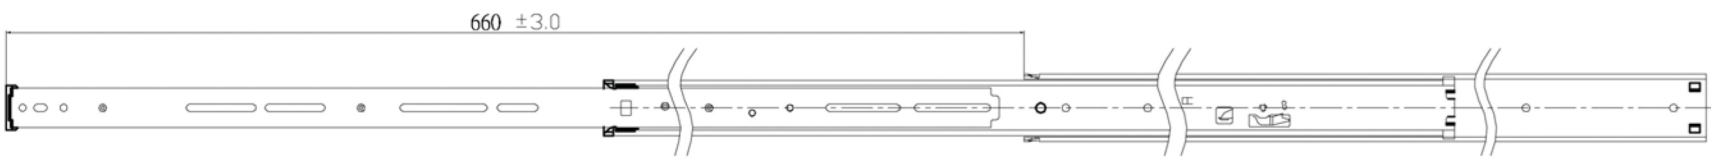
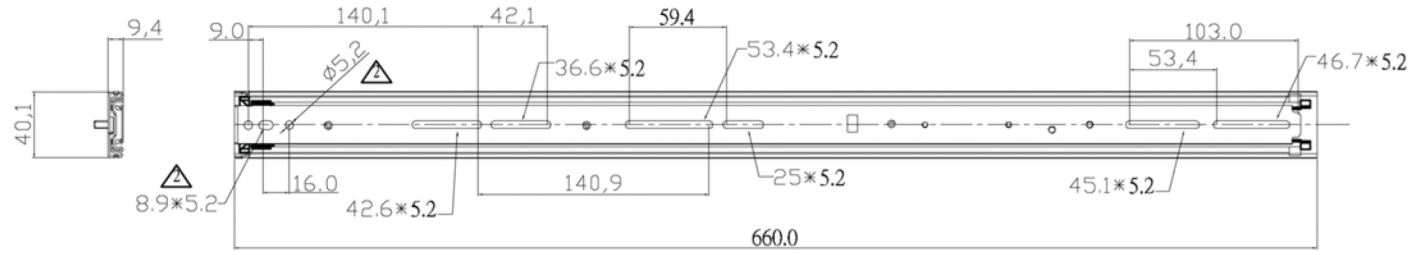

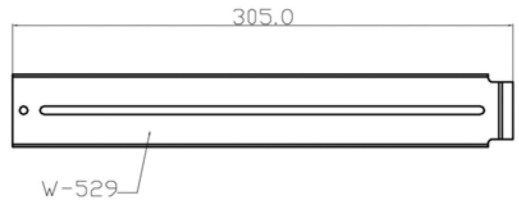


REV	DATE	DESCRIPTION	DRW
△	951122	C95136	MARK
△	960110	C96007/C95152	MARK



NOTES:

- MATERIAL: SLIDE MEMBERS AND COMPONENT PARTS WORK - HARDENED, COLD - ROLLED STEEL.
- BALL BEARINGS: CARBURIZED STEEL.
- LUBRICANT: ANTIWEAR AND EXTREME PRESSURE PROPERTIES.
- FINISH: ELECTRO - ZINC PLATED. CHROMATIC COATED CLEAR OR BLACK.
- DISCONNECTED DESIGN.
- THE FIRST INSTALLATION OF THE RAIL INTO THE SLIDE MUST BE LESS THAN 10LBS FORCE.
- PULL FORCE: 2 TO 4 LBS
- TOLERANCES ARE FOLLOWS UNLESS OTHERWISE SPECIFIED.

.XX	±0.30
.X	±0.76
HOLES	±0.15
ANGLE	±1°

DRW: MARK  
 DATE: 2006/09/19  
 CKD: CUSTOMER P/N:  
 APPD: CUSTOMER

MATERIAL: Cr3+  
 FINISH: Cr3+  
 SCALE: MODEL: TITLE: DRAWING ASS'Y  
 UNIT: inch P/N:  
 CLASSIFICATION: D/N: SHEET 1 OF 1 REV: R2