


SIZE	SL	A	B	C	D	E	F	G	H	I	J	K	L	N	M
14"	356.0	355.0	57.91		276.3									262.45	
16"	407.0	406.0	89.66		276.3									262.45	
18"	457.0	456.0	89.66		276.3									312.45	52.0
20"	508.0	507.0	89.66	184.2	276.3	368.4								348.45	52.0
22"	559.0	558.0	89.66	184.2		368.4								374.45	52.0
24"	610.0	609.0	89.66	184.2		368.4	460.5							400.45	52.0
26"	660.0	659.0	57.91	184.2	276.3		460.5			19.00	163.20	460.30	272.00	425.45	52.0
28"	711.0	710.0	57.91	184.2	276.3			552.6		19.00	163.20	460.30	272.00	434.45	52.0
30"	762.0	761.0	57.91	184.2	276.3		460.5	552.6	644.7					477.45	52.0

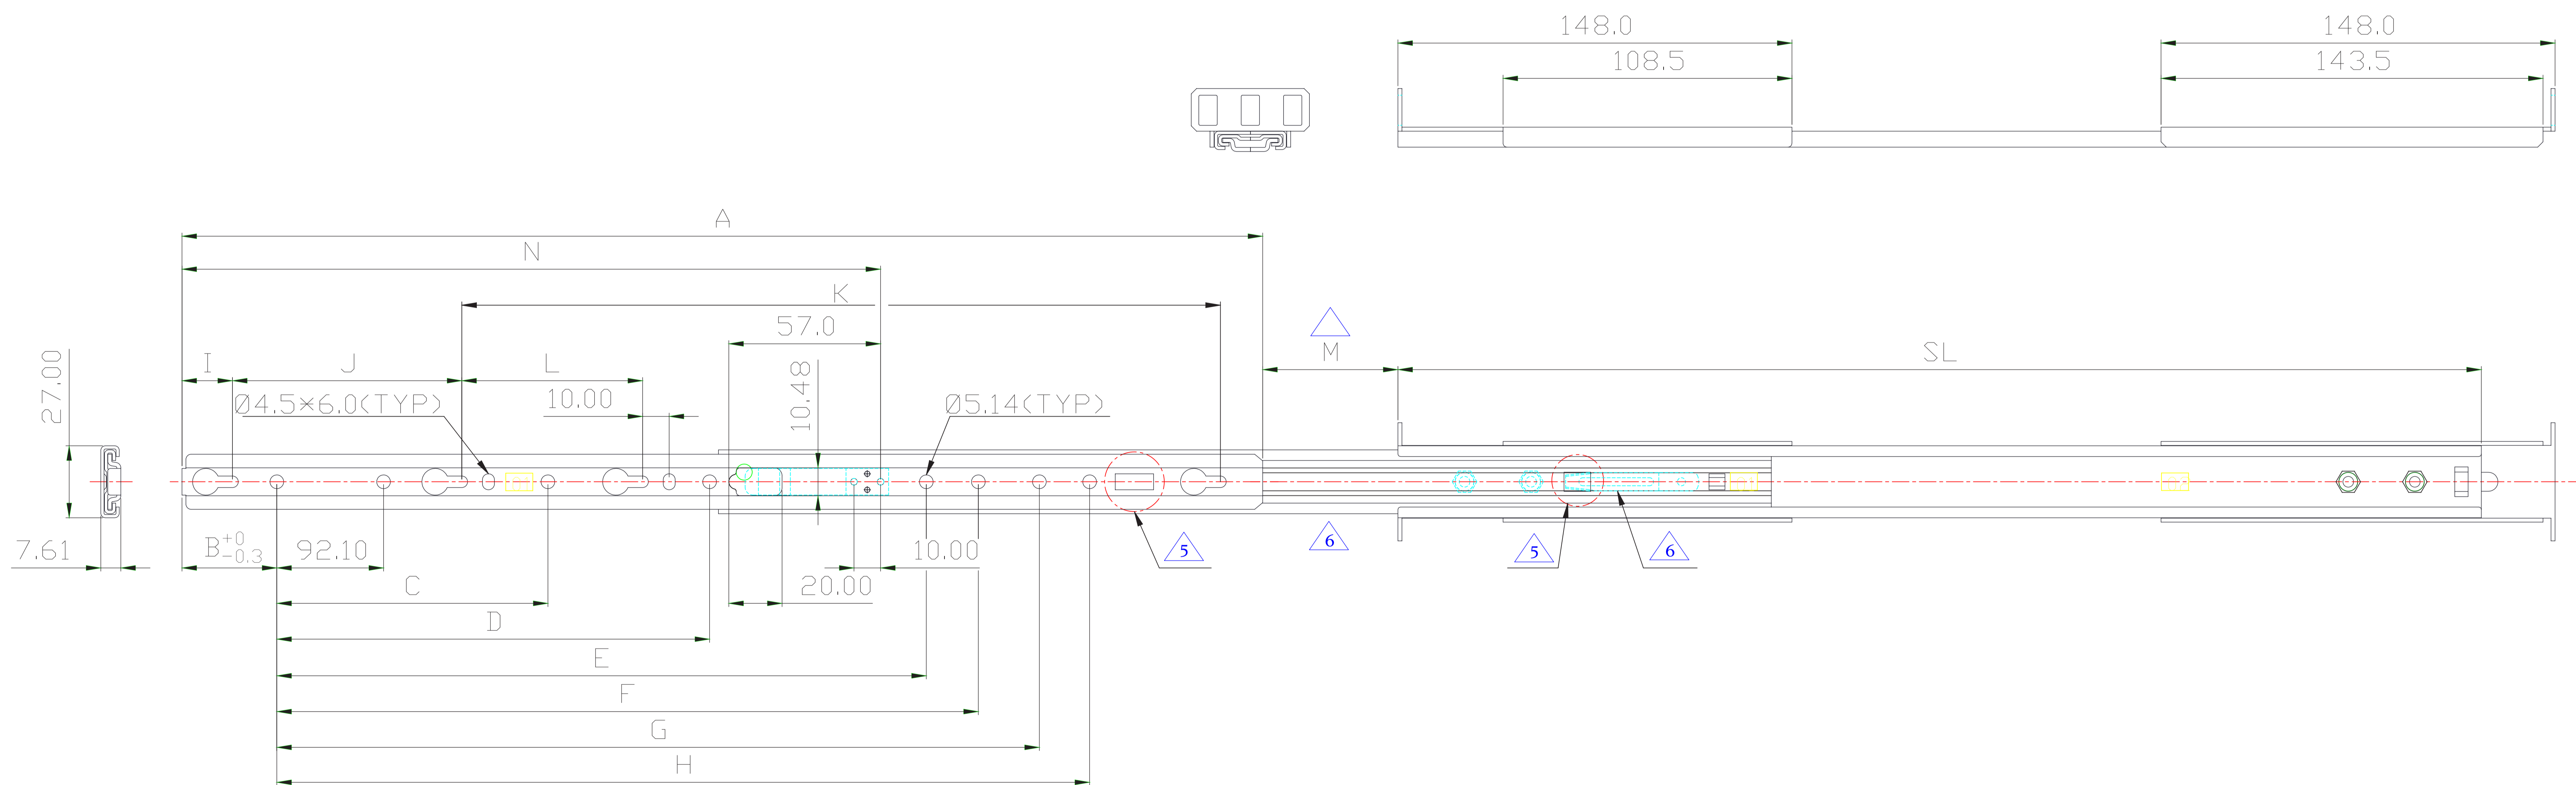

- NOTES :
1. Material Spec: Slide member—cold rolled steel, lubricant—anti-wear, high-low temperature grease
 2. Loading: 75# based on 26"
 3. Functional temperature: 5 degree C to 35 degree C
 4. Finish: zinc plated
 5. Slide is provided with disconnect

TOLERANCES ARE FOLLOWS UNLESS OTHERWISE SPECIFIED

.XX	±0.30
.X	±0.76
HOLE	±0.15
ANGLE	±1°
SCALE:	
UNIT:	mm
CLASSIFICATION:	

REV	DATE	DESCRIPTION	DRW
△	2007/02/06	20"內框實際有D尺寸的孔位, 故修改圖面	MAVIS
△	2007/04/02	修改M尺寸	WULIPI
△	2007/09/06	C96164中框及外框彈片變更	辜克怡
△	2007/11/19	CT96219/CT96233	MARK
△	2011/04/25	MSN3432新增14"(版別不變)	SARA

DRW:	李志文	CUSTOMER P/N:	
DATE:	2002/08/22	CUSTOMER:	
CKD:		APPD:	

iStarUSA®	
TITLE: RP-RAIL-26-1U	
MATERIAL:	MODEL:
FINISH:	P/N:
SHEET 1 OF 1	