T-7DE-U2



Features

- U.2 (SFF-8639) interface
- Fits 2.5?x1 U.2 NVMe SSD or SAS/SATA SSD/HDD in a 3.5" space
- Support PCle Gen3 x4; NVMe 32G & SAS 12G & SATA 6G speed
- Support SATA I/II/III and SAS I/II/III HDDs; 7-15mm thickness HDD
- Tray design with All Metal Parts; Aluminum panel
- · Mechanical lock keeps HDD working securely
- · LED indicator let users check working status any time
- Individual power switch to manage the HDD

Specifications

Model Number	Material of Handle
T-7DE-U2	Aluminum
RoHS Compliance	Material of Main Chassis
YES	Aluminum
Standard Drive Bays	Color of Main Chassis
3.5" Drives: 1	Black
Hotswap HDD Type:	Dimensions (WxHxD)
2.5? U.2 NVMe SSD or 2.5" SATA/SAS HDD	Width 3.98" (101.1 mm) Height 0.98" (24.9 mm)
Indicators	Depth 5.59" (142.0 mm)
Powr and HDD activity	

Front View

Key Lock



Tray View









We at iStarUSA Group offer OEM/ODM services for Industrial Power, Custom Power, Chassis, Cabinets, and Data Storage. Through our skilled metal bending, milling, and silk screening we can provide you with unique customizations that will make your product stand out from the rest. With iStarUSA Group's OEM/ODM Solutions you can be sure to receive one-of-a-kind products for your one-of-a-kind business.



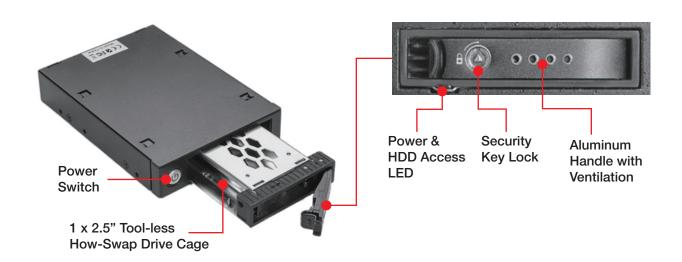

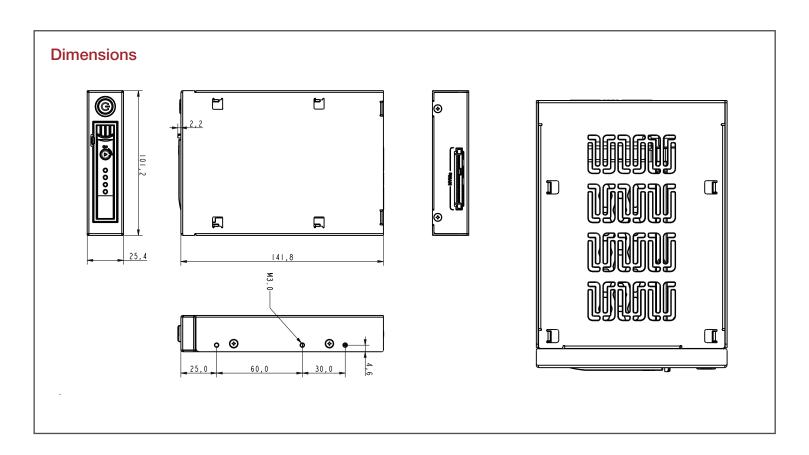

Ordering Information

Model	Description
T-7DE-U2	3.5" to 2.5" U.2 NVMe HDD Hot-swap Rack

