


NOTE:

1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
2. 公差: .XX=±0.5 [0.02]、
.XXX=±0.25 [0.01]

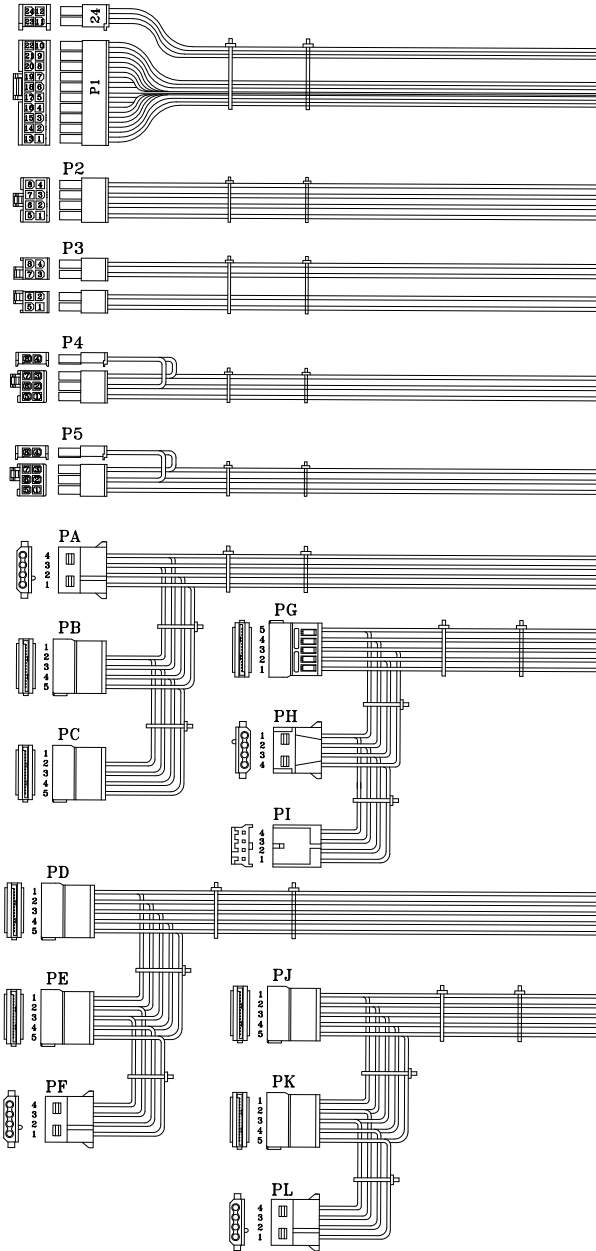

REF. ID	PIN NO.	SIGNAL	WIRE COLOR	GAUGR	CONNECTOR TYPE	CABLE LENGTH
P1 / 24	1	+3.3V	ORANGE	20	WST P20-142002K11D +P4-142002K11D or EQUIV.	550±15mm
	2	+3.3V	ORANGE	20		
	3	COM	BLACK	20		
	4	+5V	RED	20		
	5	COM	BALCK	20		
	6	+5V	RED	20		
	7	COM	BALCK	20		
	8	PW-OK	GRAY	24		
	9	+5Vsb	PURPLE	20		
	10	+12V	YELLOW	20		
	11	+12V	YELLOW	20		
	12	+3.3V	ORANGE	20		
	13	+3.3V	ORANGE	20		
	14	+3.3Vsense	BROWN	24		
	15	-12V	BLUE	24		
	16	COM	BALCK	20		
	17	PS-ON	GREEN	24		
	18	COM	BALCK	20		
	19	COM	BALCK	20		
	20	-5V	WHITE	20		
	21	+5V	RED	20		
	22	+5V	RED	20		
	23	+5V	RED	20		
	24	COM	BALCK	20		
P2	1	COM	BALCK	20	MOLEX 39-01-2080 or EQUIV.	550±15mm
	2	COM	BALCK	20		
	3	COM	BALCK	20		
	4	COM	BALCK	20		
	5	+12V	YELLOW	20		
	6	+12V	YELLOW	20		
	7	+12V	YELLOW	20		
	8	+12V	YELLOW	20		
P3	1	COM	BALCK	20	WST P4-142002K3B +P4-142002K4B or EQUIV.	550±15mm
	2	COM	BALCK	20		
	3	COM	BALCK	20		
	4	COM	BALCK	20		
	5	+12V	YELLOW	20		
	6	+12V	YELLOW	20		
	7	+12V	YELLOW	20		
	8	+12V	YELLOW	20		
P4 P5	1	+12V	YELLOW	20	WST P8-142002K21B -B or EQUIV.	550±15mm
	2	+12V	YELLOW	20		
	3	+12V	YELLOW	20		
	5	COM	BALCK	20		
	6	COM	BALCK	20		
	7	COM	BALCK	20		
	4	COM	BALCK	20		
	8	COM	BALCK	20		
PA	1	+12V	YELLOW	20	WST P4-A10202 or EQUIV.	450±15mm
	2	COM	BALCK	20		
	3	COM	BALCK	20		
PB PC PK PD PG PJ	1	+3.3V	ORANGE	20	MOLEX SD-67582-001 or EQUIV.	155±10mm
	2	COM	BALCK	20		
	3	+5V	RED	20		
	4	COM	BALCK	20		
	5	+12V	YELLOW	20		
PD PG PJ	1	+3.3V	ORANGE	20	MOLEX SD-67582-001 or EQUIV.	450±15mm
	2	COM	BALCK	20		
	3	+5V	RED	20		
	4	COM	BALCK	20		
	5	+12V	YELLOW	20		
PF PH PL	1	+12V	YELLOW	20	WST P4-A10202 or EQUIV.	155±10mm
	2	COM	BALCK	20		
	3	COM	BALCK	20		
	4	+5V	RED	20		
PI	1	+5V	RED	22	AMP 171822-4 or EQUIV.	155±10mm
	2	COM	BALCK	22		
	3	COM	BALCK	22		
	4	+12V	YELLOW	22		

UNIT:mm

MODEL NO. : TC-2U70PD8UC	TITLE: ASSY	SHEET: 1 OF 1	REV:01
R&D(2)	DRAWN	DATE	
(174.5)		SPE.23.2020	
INTERIOR COUNTERSIGN:			