


1. Specification:

No define

2. Test Condition:

- ◆ Ambient Temperature: 25.1°C. Ambient Humidity: 54%RH.
- ◆ Input voltage/frequency: 220Vac/50Hz
- ◆ Background Noise: 15.8 dB.
- ◆ Load Condition:

+5V	+12V1	+12V2	+12V3	+12V4	-12V	+3.3V	+5Vsb	Remark
1.00A	1.00A	1.00A	0.00A	0.00A	0.00A	0.50A	0.00A	Min. Load
3.40A	2.40A	2.40A	2.20A	2.20A	0.10A	2.80A	0.44A	20% Load
6.80A	4.80A	4.80A	4.40A	4.40A	0.20A	5.60A	0.88A	40% Load
10.20A	7.20A	7.20A	6.60A	6.60A	0.30A	8.40A	1.32A	60% Load
13.60A	9.60A	9.60A	8.80A	8.80A	0.40A	11.20A	1.76A	80% Load
17.00A	12.00A	12.00A	11.00A	11.00A	0.50A	14.00A	2.20A	Full Load

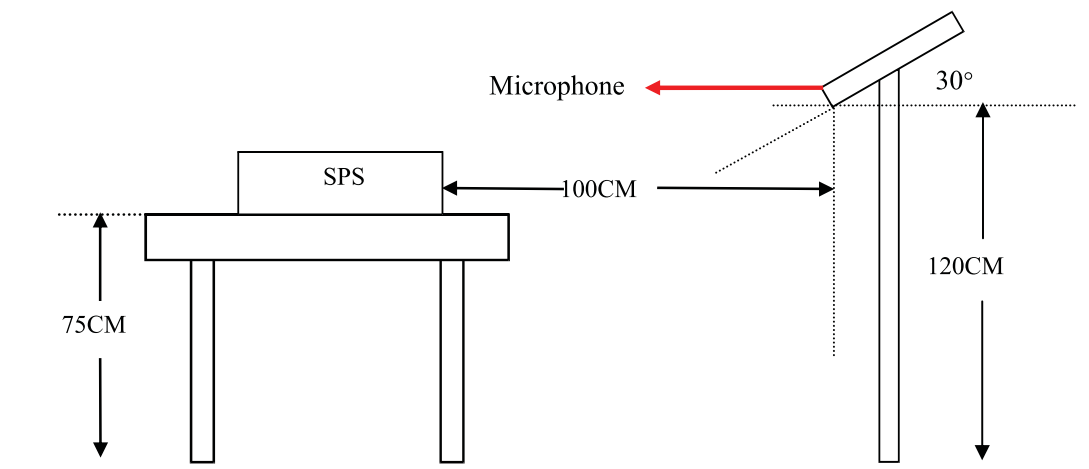


*Warm Up Time: 15 ~ 20 Minutes / Load Condition

3-1. Test Record:

Vin/Fin	Load	Length	After Duration	SPEC.(Max)	Noise AVG.	Test Result
230Vac/50Hz	Min. Load	100(cm)	15~20(Minutes)	*	36.2dB	REF.
	20% Load				37.4dB	REF.
	40% Load				42.5dB	REF.
	60% Load				46.5dB	REF.
	80% Load				47.1dB	REF.
	Full. Load				47.5dB	REF.

3-2. Test Graph:

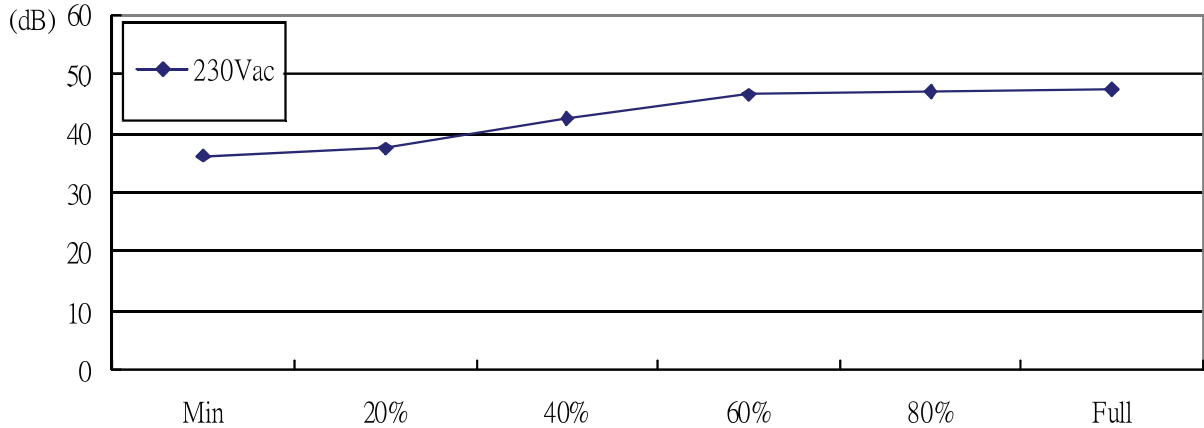

4. Test Result:

REF.