

U-280HD

2U 8-Bay Storage Server Rackmount Chassis



Features

- Fiber Optical Drive Tray Status Indicator
- Advance Thermal Cooling Design Optimizes Airflow
- Cooling Fans with Status Monitor
- Slim SAS (SFF-8654) HDD Backplane
- Front Access USB 3.0 Connector
- Power + Fan Failure + HDD LED Indicator
- Power/Alarm Reset Switch
- Fully RoHS Compliance
- Support 12Gb/s SAS/SATA Hard Drives
- Aluminum Front Panel with Locks


Specifications

Model Number	Expansion Slots	Cooling Fan	
U-280HD	7 (Low profile)	3x80mm	
RoHS Compliance	Security	Dimensions (WxHxD)	
YES	Front Bezel	Width	19.00" (482.6 mm)
		Height	3.46" (87.9 mm)
		Depth	21.25" (539.8 mm)
Form factor	Material of Front Bezel		
2 U	steel with anodize color paint		
Standard Drive Bays	Material of Handle		
2.5" Drive (internal): 1 Hotswap 3.5": 8	Aluminum		
3.5" Drive (internal): 1 Slim 5.25" Optical: 1			
Hotswap HDD Type:	Material of Main Chassis		
3.5" SAS I/II/III & SATA I/II/III	Heavy-duty SGCC Cold-rolled Steel		
Indicators	Front Connector		
Power + Fan Failure + HDD LED	2x USB 3.0		
Switches	Motherboard Size		
Power, Reset, Mute	12 x 10.5 (ATX, microATX)		

Front View



Inside View




Rear View



We at iStarUSA Group offer OEM/ODM services for Industrial Power, Custom Power, Chassis, Cabinets, and Data Storage. Through our skilled metal bending, milling, and silk screening we can provide you with unique customizations that will make your product stand out from the rest. With iStarUSA Group's OEM/ODM Solutions you can be sure to receive one-of-a-kind products for your one-of-a-kind business.

Dimensions

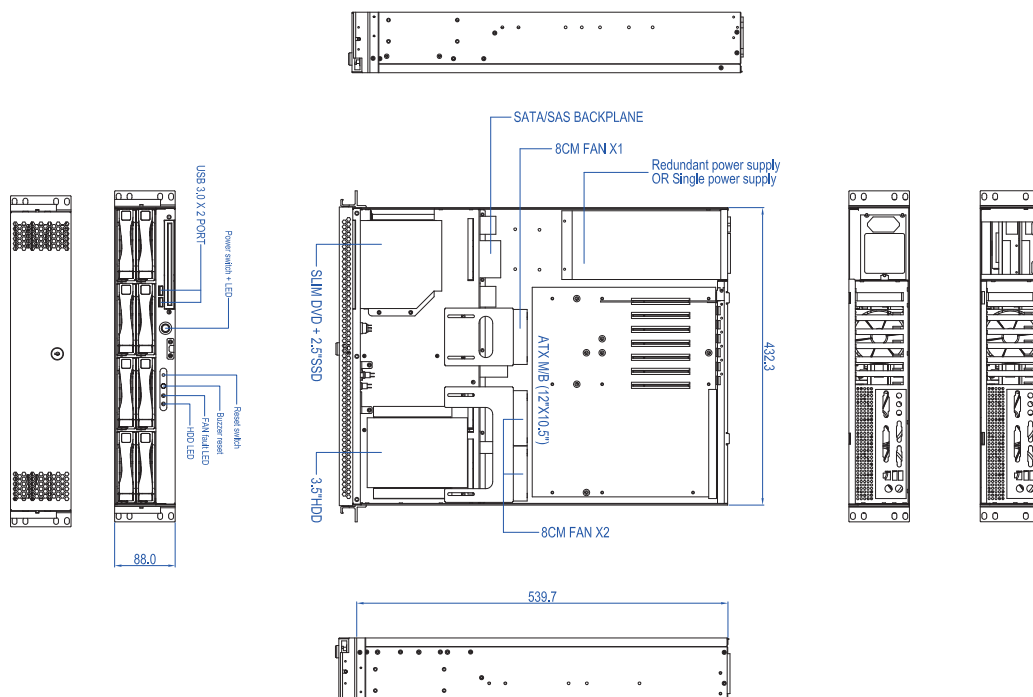

Ordering Information

Model	Description
U-280HD	2U 8-Bay Storage Server Rackmount Chassis

Compatible Power

PSU Model	Description
IS-2U35PD8	IS 2U 80PLUS 350W
IS-2U46PD8	IS 2U 80PLUS 460W
IX-1300R2UPD8	2U 1300W 80+ Platinum Redundant
IX-750S2UPD8G	2U 750W 80+ Gold Redundant

Optional Accessories

Category	Model
Sliding Rail Kit	RP-RAIL Series Slim Sliding Rail Kit