


IS-500RSH1UP

500W 1U Redundant 1+1 Power Supply

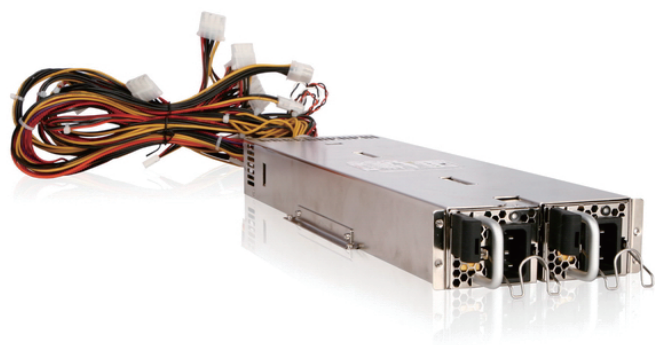


Features

- Active PFC, Power Factor ≥ 0.95
- Hold up Time: 16ms at 80% Load
- 5 Output Rails
- Front Access Ability
- Power Failure Alarm
- Over Current Protection
- Over Voltage Protection
- Short Circuit Protection
- PMBus Support

Specifications

Model Number	Efficiency
IS-500RSH1UP	80%
RoHS Compliance	Connector Type
YES	Main Connector :: 20+4 pin/ 4+4pin 12V :: 1/ 8pin EPS 12V :: 1 Molex :: 6/ Floppy :: 1
Output Wattage	Dimensions (WxHxD)
500	Width 4.17" (105.9 mm) Height 1.63" (41.4 mm) Depth 13.98" (355.1 mm)


Front View

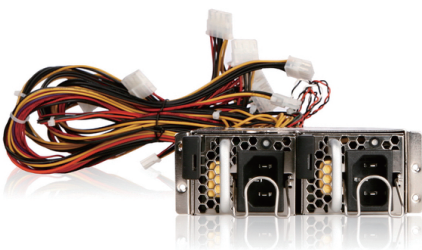

Side View





Rear View

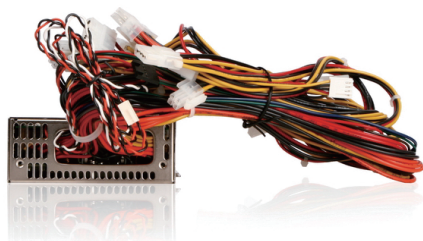

We at iStarUSA Group offer OEM/ODM services for Industrial Power, Custom Power, Chassis, Cabinets, and Data Storage. Through our skilled metal bending, milling, and silk screening we can provide you with unique customizations that will make your product stand out from the rest. With iStarUSA Group's OEM/ODM Solutions you can be sure to receive one-of-a-kind products for your one-of-a-kind business.

Dimensions

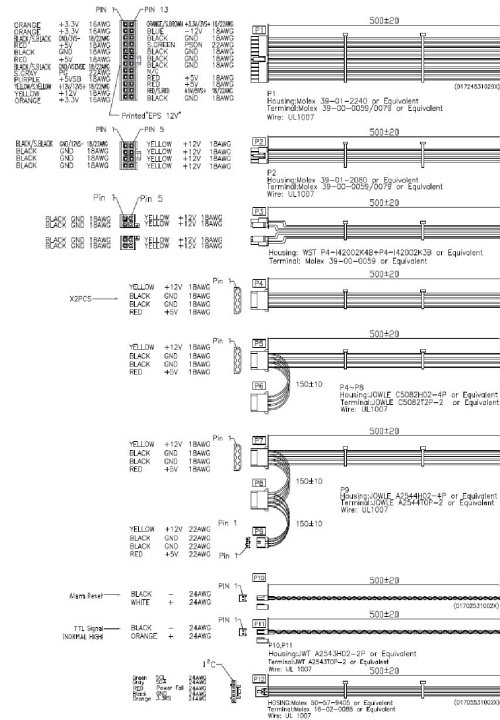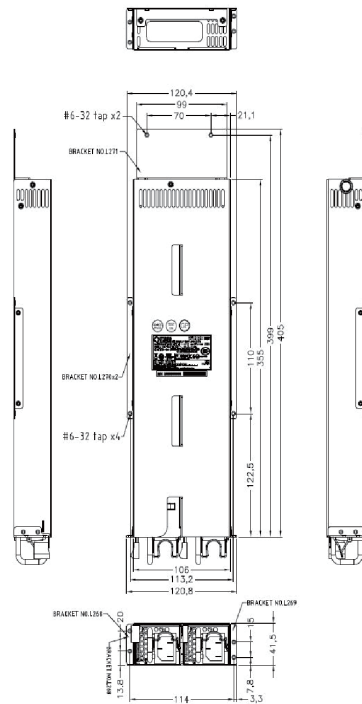

Compatible Chassis

* Please visit our website www.istarusa.com/en/xeal for a full list of compatible chassis

Optional Accessories

Accessory	Description
IS-500RSH1UP-M	500W 1U Redundant Power Supply Module for IS-500RSH1UP

Output Rating

Output Voltage	+3.3V	+5V	+12V	-12V	+5VSB
Max. Load	20A	20A	38A	0.5A	3A
Min. Load	0.5A	0.5A	1A	0A	0.1A