


IS-2U40PD8

2U 400W 80 Plus High Efficiency Power Supply

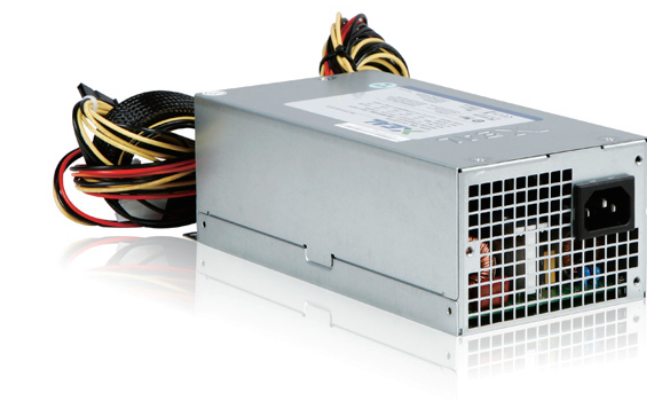

Features

- 80 Plus High Efficiency and Reliability
- 16ms Hold Up Time
- Over Current Protection
- Over Voltage Protection
- Short Circuit Protection
- Low Noise and Thermal-controlled Fan

Specifications

Model Number	Efficiency
IS-2U40PD8	80%
RoHS Compliance	Connector Type
YES	Main Connector :: 24 pin/ 4pin 12V :: 1/ 8pin EPS 12V :: 1/ Molex :: 4 SATA :: 2/ Floppy :: 1
Output Wattage	Dimensions (WxHxD)
400	Width 3.94" (100.1 mm) Height 2.76" (70.1 mm) Depth 7.87" (199.9mm)


Front View



Side View




Rear View

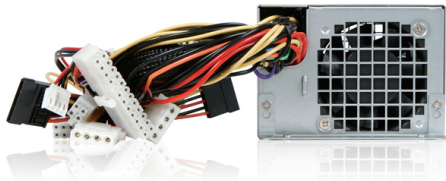

We at iStarUSA Group offer OEM/ODM services for Industrial Power, Custom Power, Chassis, Cabinets, and Data Storage. Through our skilled metal bending, milling, and silk screening we can provide you with unique customizations that will make your product stand out from the rest. With iStarUSA Group's OEM/ODM Solutions you can be sure to receive one-of-a-kind products for your one-of-a-kind business.

Dimensions

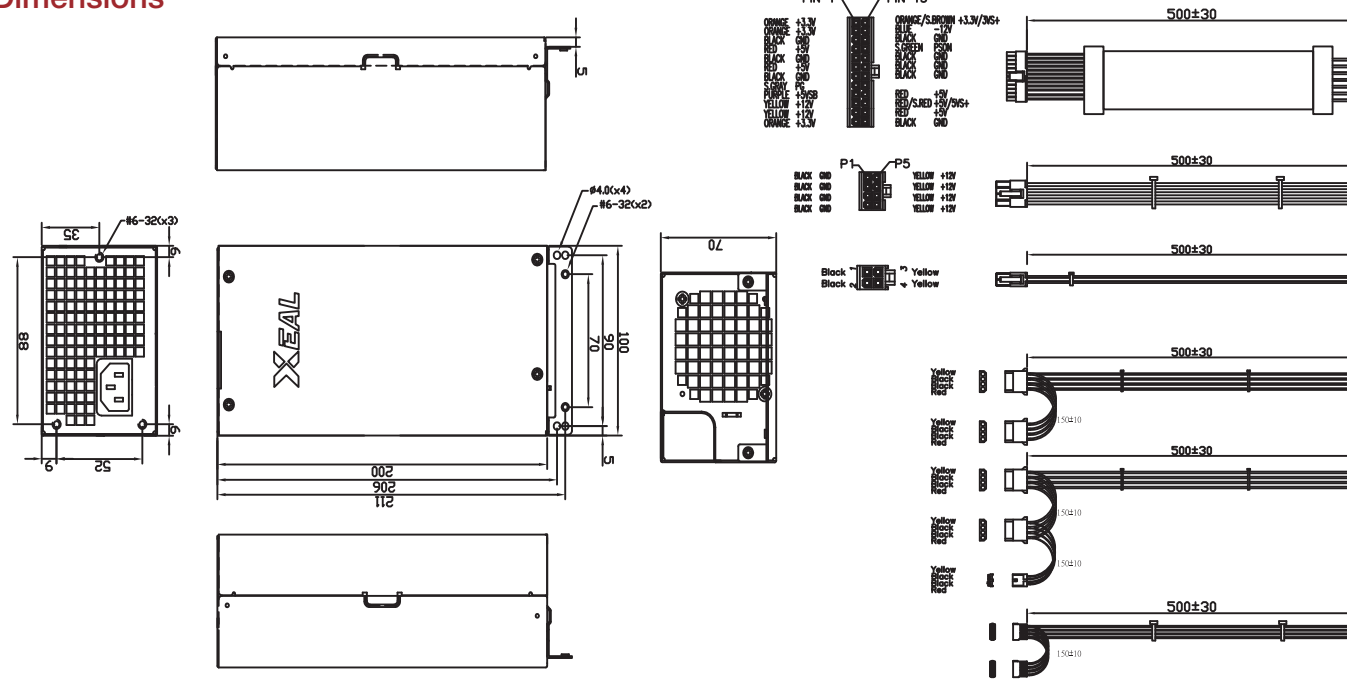

Compatible Chassis

* Please visit our website www.istarusa.com/en/xeal for a full list of compatible chassis

Output Rating

Output Voltage	+5V	+3.3V	+12V (Single Rail)	-12V	+5VSB
Max. Load	20A	20A	33A	0.8A	3A
Min. Load	0.5A	0.5A	1A	0A	0A
Max. Combined	130W		396W	6W	15W
Total Output	400W				