Fanless Desktop for Mini-ITX



Features

- Designed for mini-itx motherboard with CPU TDP 50W max
- 2 x front USB 2.0 ports (USB 3.0 optional)
- 1 x 3.5 inch front hot-swappable drive bay
- Fully customizable and ready to be OEM/ODM


Specifications

Model Number	Back Panel
FS-1012	Standard I/O shield.
RoHS Compliance	Motherboard Size:
YES	For Mini-ITX MB
Standard Drive Bays	External Adapter Input
Internal Drive Bay : 2.5" HDD x 1 Hot Swappable Drive Bay: SATA 3.5" HDD tray x1 (Hot-swap)	C4 DCV 19V - 24V 150W
Front Panel	Dimensions (WxHxD)
Power SW x1 + LED + HDD LCD USB 2.0 Port x2 (USB3.0 optional).	Width 15.00" (381.0 mm) Height 3.40" (86.4 mm) Depth 10.20" (259.1 mm)

Front View



Inside View




Rear View



We at iStarUSA Group offer OEM/ODM services for Industrial Power, Custom Power, Chassis, Cabinets, and Data Storage. Through our skilled metal bending, milling, and silk screening we can provide you with unique customizations that will make your product stand out from the rest. With iStarUSA Group's OEM/ODM Solutions you can be sure to receive one-of-a-kind products for your one-of-a-kind business.



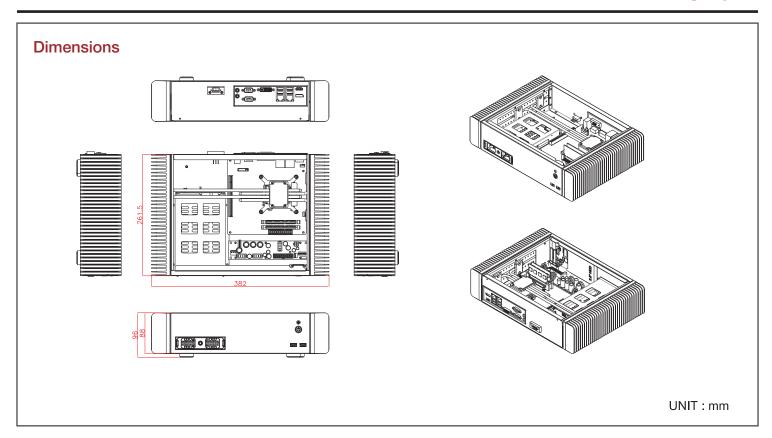

Ordering Information

Part Number	Description	
FS-1012	Fanless Desktop for Mini-ITX	

Optional Accessories

Part Number	Model
FS-DCP150	DC-DC Converter Board
FS-DCP78	DC-DC Converter Board
FS-DCP78CBL	DC-DC Converter Board
FS-DCP80	DC-DC Converter Board