Fanless Desktop for Mini-ITX



Features

- Designed for mini-itx motherboard with CPU TDP 40W max
- 2 x front USB 2.0 ports (USB 3.0 optional)
- 3 x Expansion Slots
- 2 x 3.5 inch front hot-swappable drive bays
- Supports slim ODD
- Fully customizable and ready to be OEM/ODM

Specifications

	lodel Number		Form Factor	
	FS-1021		3U	_
	RoHS Compliance		Motherboard Size:	
	TES Standard Drive Bays Internal Drive Bay: 2.5" HDD x 2. Front Panel		For Mini-ITX	
			External Adapter Input	
			ADAPTER 120W/19V x1 + C4(19-24Vdc 150W) Converter x 1	
			Dimensions (WxHxD)	
	Power SW x1 + Power LED x1 + HDD LCD x1 Slim ODD x1 Back Panel	USB Port x 2 (USB3.0 optional). 3.5" HDD HOT-SWAP Tray x2.	Width Height Depth	16.90" (429.3 mm) 5.10" (129.5 mm) 10.40" (264.2 mm)

Standard I/O shield.

Expansion PCI/PCI-E slot x 3.

Front View



Inside View




Rear View



We at iStarUSA Group offer OEM/ODM services for Industrial Power, Custom Power, Chassis, Cabinets, and Data Storage. Through our skilled metal bending, milling, and silk screening we can provide you with unique customizations that will make your product stand out from the rest. With iStarUSA Group's OEM/ODM Solutions you can be sure to receive one-of-a-kind products for your one-of-a-kind business.



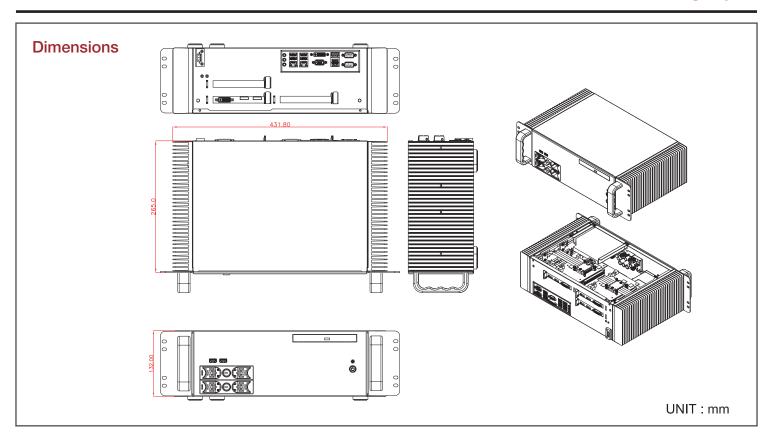

Ordering Information

Part Number	Description		
FS-1021	Fanless Desktop for Mini-ITX		

Optional Accessories

Part Number	Model		
FS-DCP150	DC-DC Converter Board		
FS-DCP78	DC-DC Converter Board		
FS-DCP78CBL	DC-DC Converter Board		
FS-DCP80	DC-DC Converter Board		