

# S-10000

## High Performance Professional ATX Tower



### INTRODUCTION


A combination of style and performance is the feature of S-10000 workstation/server chassis. It is uniquely designed for IT professional and enterprise level application. Tool-less design of the S-10000 helps system builder or technician to install, maintain, or upgrade components. Excellent thermal solution meets FMB2.0 and CAG 1.1 which supports the latest CPU. The five HDD cages support high density storage or Raid application. Easy access Front I/O panel and sliding aluminum front bezel door is people friendly and can be customized to enhance product image.

### FEATURES

- Ⓐ Tool-less Thumb Screws
- Ⓑ Lockable Sidepanel
- Ⓒ Sliding Front Bezel
- Ⓓ Removable HDD Trays
- Ⓔ Revolving I/O Connectors
- Ⓕ Flip-Open Cover for Optical Devices
- Ⓖ Optional LED Light




Accessories

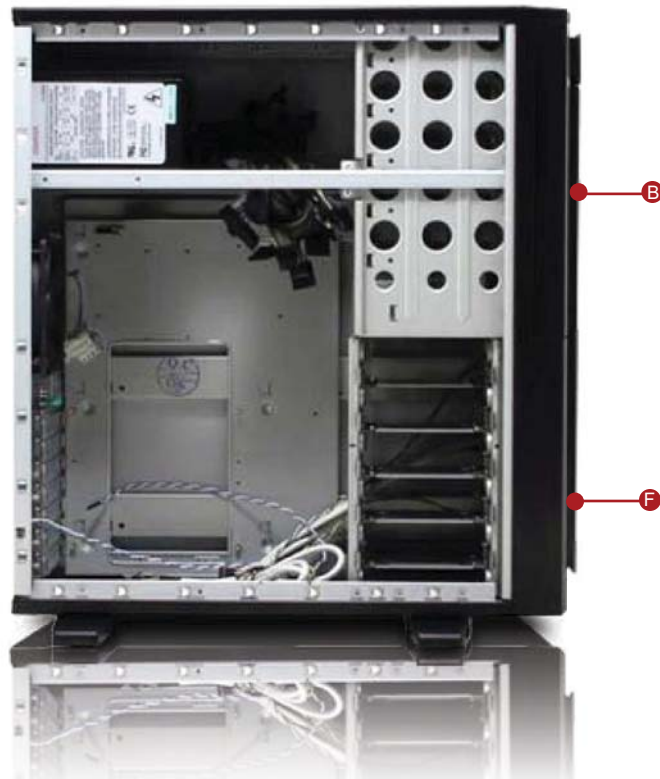

# S-10000

## DRAWING

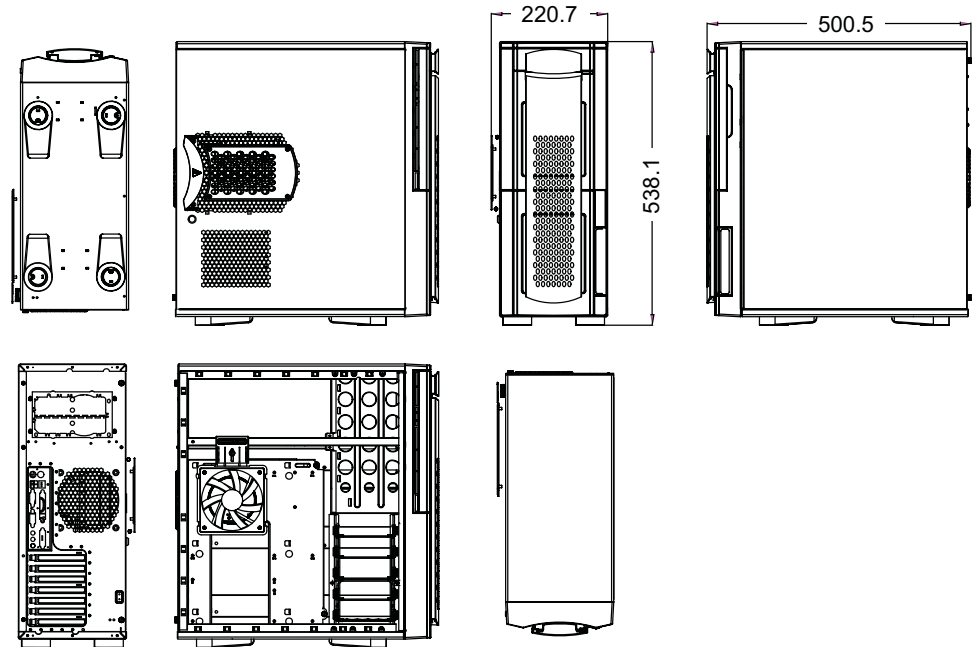

## SPECIFICATIONS

|                                |   |                                 |  |
|--------------------------------|---|---------------------------------|--|
| <b>Model Number</b>            | <b>S-10000</b>  | <b>Switches</b>                 | Power ON/OFF, System & Alarm Reset                                     |
| <b>RoHS Compliance Version</b> | Yes   | <b>Air Filter</b>               | Removable & Washable   |
| <b>Standard Drive Bays</b>     | 5.25" Drive: 5<br>3.5" Drive: 2<br>3.5" Drive [internal]: 5 | <b>Security</b>                 | Front Bezel  |
| <b>Cooling Fan [Option]</b>    | 1x120mm [1x120mm]   | <b>Material of Front Bezel</b>  | Aluminum   |
| <b>Mainboard Size [inch]</b>   | 12 x 10   | <b>Material of Main Chassis</b> | 1.0mm SECC/SGCC  |
| <b>Indicators</b>              | LEDs for Power ON/OFF, HDD, Fan & Alarm                     | <b>Color of Front Bezel</b>     | Black/Silver   |
| <b>Speaker</b>                 | 0.4W Built-In   | <b>Color of Main Chassis</b>    | Black/Silver   |
|                                |   | <b>Front Connector</b>          | USB 2.0 x 2 Connector<br>1 x IEEE1394, 1 x Line Out,<br>1 x Microphone |
|                                |   | <b>Dimensions (WxHxD)</b>       | 8.2 x 21.3 x 19.2 inch   |

## OPTIONAL ACCESSORIES

| Model Number | Page | Model Number | Page |
|--------------|------|--------------|------|
| BPU-230SATA  | 154  | BPU-340SATA  | 155  |
| DD-Fan80     | 163  | RP-HDD3.5    | N/A  |
| T-7          | 158  | TC-iStorm7/8 | 160  |

## POWER SUPPLY OPTIONS

| Model Number      | Output       | Page | Model Number          | Output           | Page |
|-------------------|--------------|------|-----------------------|------------------|------|
| TC-300/400R8      | 300/400W     | 208  | TC-350/400/500PD1     | 350/400/500W     | 230  |
| TC-300/400/500R8A | 300/400/500W | 210  | TC-600/650/700/750PD2 | 600/650/700/750W | 234  |
| TC-580/620PD3     | 580/620W     | 232  |                       |                  |      |
| TC-600/700R3N     | 600/700W     | 212  |                       |                  |      |

:: Specification and wiring diagram subject to change without notice  
 :: Limited Life Time Warranty  
 :: Last Update: Oct/2007

