


iAGE840ML2

Tower 8-bay Multilane SAS/SATA Enclosure

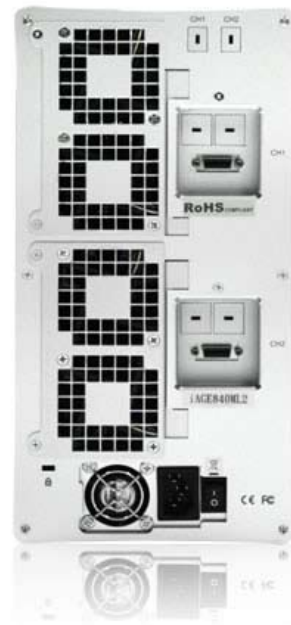

INTRODUCTION

iAGE840ML2 is a 8 Bay external Hot-Swap SAS/SATA Enclosure. It provides users a flexible solution for SAS or SATA HDD and high performance external data storage solution for HD of 1080p video editing or any high resolution video platform. This 8 Bay external SAS/SATA JBOD is designed with 2 multilane interfaces brings users the experience of easy installation and fast data transmission.

FEATURES

- Aluminum Housing and Anodized Surface, Ideal for Cooling and Durability
- Supports SATA (3Gbps)
- High Performance SAS/SATA Backplane Design for 8 Removable SAS/SATA Drive Trays
- Built-in Fans for Self-Contained Ventilation
- Individual Key Lock of Each HDD Tray for Physical Security
- LED Indicators for Power and Activity on Each HDD Tray
- Environmental Monitoring with Power/FAN/TEMP LEDs and Mutable Buzzer Alarm

iAGE840ML2

SPECIFICATION

Host Interface	SAS/SATA II (two multilane x 4 connector)
HDD Interface	SAS/SATA I/II
Data Transfer Rate	SAS 3 Gbps & SATA 1.5/3 Gbps
Hot-Swap	Both on Host and Device
Tray LED Display	Green – Power on indicator; Blue – Busy (HDD Accessing) indicator
LED Display for Environmental Monitoring	POWER on LED - white FAN normal – green; fail – red (too slow rpm or stop) TEMP normal – green; over 55°C – red
Dimension LxWxH (cm)	23.15 x 15.68 x 31.0 cm
Material	Anodized Aluminum with Mirror Acrylic plastic front panel & Plastic Tray Face
Power Supply	300W (high reliability of IPC form-factor) Input: 90 – 230 VAC, 50 – 60 Hz; Output: +5V and +12V DC
Cooling	4 set of 60 x 60 x 10 mm Cooling Fans
O.S. Support	OS Independant



PACKAGE CONTENT

- Enclosure x 1
- HDD Tray x 8
- Multilane Cable x 2 (Optional)
- Power Cord x 1
- Manual CD-ROM x1
- Hard Disk Drive Mounting Screw x 32
- Key for HDD Tray x 2