

# BPX-35U3-SA 3.5" to 2.5" SATA 6.0 Gbps HDD/SSD Hot-Swap Rack for Internal SATA and External USB 3.0 Applications

## User Manual



### Specifications:

<b>Hot Swap</b>	2.5" Drive: 1
<b>Standard Drive Bays</b>	3.5" Drive: 1
<b>Dimensions (W x H x D)</b>	102.0 mm x 25.2 mm x 165 mm
<b>Material</b>	Aluminium (main body)
<b>HDD Interface</b>	SATA
<b>Weight</b>	0.2 kg
<b>Cable</b>	SATA Cable Included (1pcs) Floppy to Molex Power Cable Included (1pcs) USB 3.0 Micro-B to Standard-A Cable Included (1pcs)

### iStarUSA - Powered by iStarUSA Group

727 Phillips Drive City of Industry, CA 91748  
 United States of America  
 Tel: 1-626-303-8885  
 Toll-Free: 1-888-989-1189  
 Email: sales@istarusa.com



### Introduction:

The iStarUSA BPX-35U3-SA gives you the flexibility to bring your storage with you quickly and easily without having to deal with numerous cables. When at the office or at home, just insert the enclosure into the rack and you will instantly have a super-speed SATA connection to your drive. If you need to take it with you, just eject the enclosure, grab the included USB 3.0 cable, and you'll still have access to all of your data while on the road.


### Order Information:

Model Number:	Color:	UPC Code:
<b>BPX-35U3-SA</b>	<b>Black</b>	<b>846813036160</b>

### Features:


- Easily connect a 2.5" HDD/SSD to your computer using this specially-designed rack.
- Internally: Use the rack's SATA interface to connect.
- Externally: Connect to other computers conveniently with USB3.0 or USB2.0 (USB 3.0 cable included).
- Designed to minimize dust intrusion: The drive door closes automatically when ejecting a drive from the enclosure.
- Aluminum alloy body for strength and efficient heat dissipation.
- LED indicators for power & HDD activity.
- Fits in any standard 3.5" drive bay.
- Compatible with 7mm & 9.5mm 2.5" SATA I/II/III HDD and SSD.

### Hardware Information: Front View

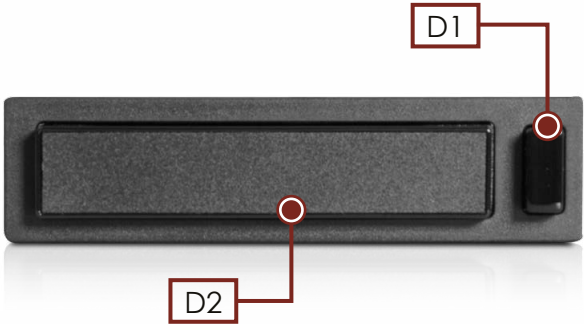

- D1**  
Eject Button: Press the button to eject the HDD enclosure.
- D2**  
Hidden LED indicator:  
 Solid blue illumination for HDD power on.  
 Blinking blue illumination for HDD access.  
 \*Note: LED indicator might not work with some SSDs.

## Hardware Information: Rear View

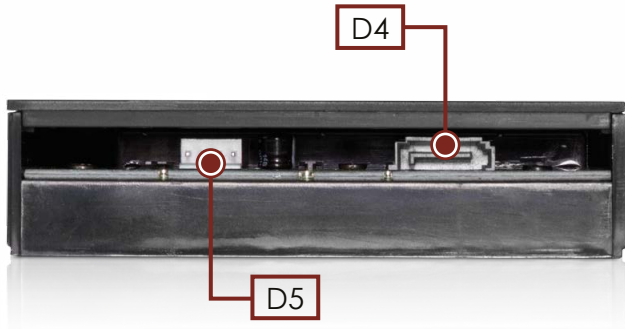

**D4**  
SATA 7-pin data connector


**D5**  
4-pin Floppy power connector

## Hard Drive Installation


1) Press the eject button to eject, and pull the HDD enclosure out.



2) Use the screwdriver to unscrew the back cover. Take out the PCB.

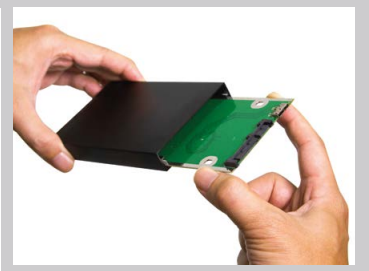

3) Place HDD/SSD onto the PCB, and connect to SATA connector. Use M3 screws to secure the HDD/SSD.

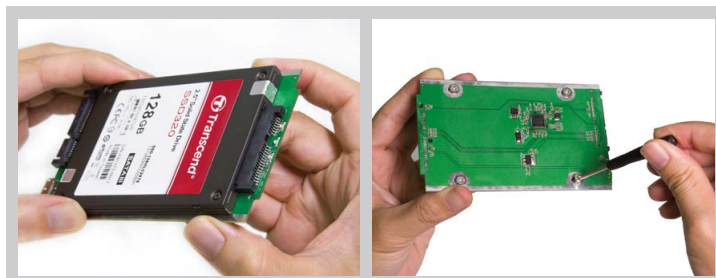


4) Insert the PCB back to the HDD enclosure and secure the back cover with screws.




## BPX-35U3-SA Installation

1) Install BPX-35U3-SA to a computer with one 3.5" drive bay available  
2) Connect SATA 7-pin data cable, one end to the BPX-35U3-SA and the other end to a motherboard

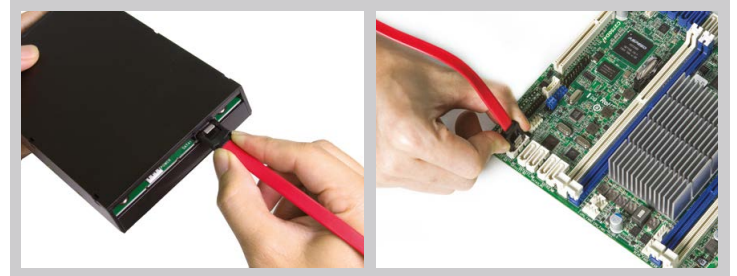

3) Connect the Floppy to Molex power cable. Floppy end to the BPX-35U3-SA and Molex end to a power supply.

4) Insert the HDD enclosure.

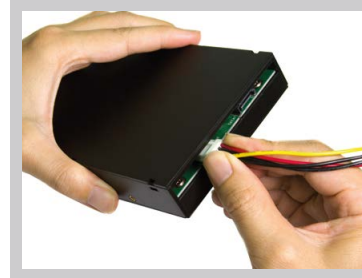

## External Application with USB 3.0 Connection

1) Eject the HDD enclosure

2) Connect the USB 3.0 Micro-B to Standard-A cable. One end to the BPX-35U3-SA and the other end to a computer with an USB 2.0 or 3.0 port available.



## Included Accessories

• Power cable, SATA cable, USB3.0 cable, screwdriver, screws

