

T-7M1-SATA 3.5" Hard Drive Cage

User's Manual



iStarUSA – Powered by iStarUSA Group
 727 Phillips Drive
 City of Industry, CA 91748
 Tel: (888) 989-1189
 Email: sales@istarusa.com



Specification:

Hot Swap	1x3.5" HDD
Cooling Fan	1x80mm
Standard Drive Bays	5.25" Drive: 1
Dimension (W x H x D)	5.75 x 1.65 x 7.32 inches
HDD Interface	SATA I/II/III, SAS I/II
Weight	2 lbs
Cable	SATA Cable Included (1pcs)

Order Information:

Model Number:	Color:	UPC Code:
T-7M1-SATA-BLACK	Black	846813010740
T-7M1-SATA-RED	Red	846813010788
T-7M1-SATA-BLUE	Blue	846813010757
T-7M1-SATA-SILVER	Silver	846813010795
T-7M1-SATA-BPL (lockable handle)	Plastic	846813010733

Introduction:

The T-7M1-SATA mobile rack by iStarUSA is a hot-swappable HDD cage. With unique compact size and high performance SAS/SATA interface, the T-7M1-SATA is tough in strength, but flexible in functionality. Additional blower cooling fan provides extra cooling in unfavorable operating conditions. The LED indicator enables monitoring of power and hard drive activities. The T-7M1-SATA audio mobile rack is constructed with quality and designed for versatility.

Features:


- Power/Drive Activity LEDs
- Point to Point, Free from Master/Slave Setting
- Best Air Ventilation with 1x80mm HDD Blower Fan
- Power ON/OFF Button
- Aluminum Metal Handle
- Cable-less Connection, Support Plug & Play, Hot-Swappable
- High Performance Transfer Rate up to 6.0 Gb/s
- Support SAS I/II & SATA I/II/III HDD

Hardware Information: Front View



- D-1:** Power LED, blue when lid.
- D-2:** HDD activity LED, purple blinking when lid.
- D-3:** Power Switch

Hardware Information: Rear View

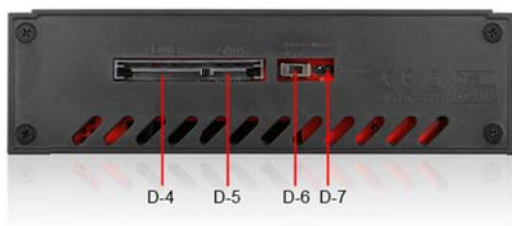

- D-4: 15-pin power connector
- D-5: 7-pin data connector
- D-6: HDD LED Enable/Disable Switch (default: Enable, left)
- D-7: HDD LED-pin. (for external activity LED use)

Quick Installation Procedure:

1. Open up the handle bar from the tray; take out the HD trays from the HD cage.
2. Secure all screws to the HD attached with HD tray.
3. Place the hard drive tray(s) with HD installed, back into the cage unit.
4. Connect data and power cable onto the rear end of cage unit. (Make sure that the data cables connected to the motherboard side as well).
5. Turn on the Power of your computer and wait until Operating System finish loading up.
6. Turn on the D-3 Power Button.

Note:

For steps 6- if the operating system installed with a HD inside of HD cage, please make sure you do turn on the Power from the cage switches D-3.


Accessories:

- 1 SATA cables
- Screws



2.5" or 3.5" Hard Drive Disk to the trays Installation:

1. Insert 2.5" or 3.5" Hard Drive into the HDD Tray from the cage.
2. Use the provided screws and fasten HD into highlighted 2.5" or 3.5" holes to the cage trays.
3. Make sure Secure with screw holes from the Bottom of 2.5" or 3.5" Hard Drive's.
4. After the screw installation, slide the HDD Tray back to the HDD Canister Base.
5. Next, follow the Quick Installation in next page for the rest of the Setup.

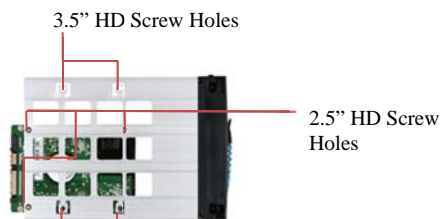

HD Tray: Bottom View

3.5" HD Screw Holes

Optional Accessories:

HD Trays	Model Number	UPC Code:
Black	BPU-HSTRAY-BLACK	846813000635
Red	BPU-HSTRAY-RED	846813000659
Blue	BPU-HSTRAY-BLUE	846813000642
Silver	BPU-HSTRAY-SILVER	846813000673
Plastic	BPU-HSTRAY	846813000628

iStarUSAcare:



We will help you navigate our website to find the information that you need. Go to www.istarusa.com, and click on live chat bubble above the Search Bar



Our technicians are standing by to take your questions. Visit <http://istarusa.com/support/>, and you will receive a technical support ticket to help track your requests from the beginning to the end. Or you can contact us @ 888-989-1189

FCC and CE Radiation Norm
 FCC
 This equipment has been tested and found to comply with limits for Class B digital device pursuant to Part 15 of Federal Communications Commission (FCC) rules.
 CE
 This equipment has been tested and found to comply with the limits of the European Council Directive on the approximation of the law of the member states relating to electromagnetic compatibility (89/336/EEC) according to EN 55022 Class B.
 FCC and CE Compliance Statement
 These limits are designed to provide reasonable protection against frequency interference in residential installation. This equipment generates uses and can radiate radio frequency energy, and if not installed or used in accordance with the instructions may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in television reception, which can be determined by turning the equipment off and on. The user is encouraged to try and correct the interference by one or more of the following measures: Reorient or relocate the receiving antenna, increase the separation between the equipment and the receiver, connect the equipment into an outlet on a circuit different from that to which the receiver is connected to.
 CAUTION!
 The Federal Communications Commission warns the user that changes or modifications to the unit not expressly approved by the party responsible for the compliance could void the user's authority to operate the equipment.