

BPU-230HD 3.5" HDD 12Gb/s Hot-swap Rack

User's Manual



iStarUSA – Powered by *iStarUSA Group*

3500 E. Francis St.
Ontario, CA 91761

Tel: (888) 989-1189

Email: sales@istarusa.com

Specification:

Hot Swap	3x3.5" HDD
Cooling Fan	1x80mm
Standard Drive Bays	5.25" Drive: 2
Dimension (W x H x D)	5.75 x 3.39 x 7.95 inches
Material	Aluminum Design with Conductive Dissipation Grooves
HDD Interface	SATA / SAS
Weight	3 lbs
Cable	SATA Cable Included (3pcs)

Order Information:

Model Number:	Color:
BPU-230HD-BLACK	Black
BPU-230HD-RED	Red
BPU-230HD-BLUE	Blue
BPU-230HD-SILVER	Silver
BPU-230HD-BPL (lockable handle)	Plastic


Introduction:

Create more space in your computer case by using the BPU-230HD HDD cage series that supports RAID 1/0/1+0/5 configuration for high performing data recovery or redundancy application. Its aluminum construction translates into lighter system weight and better heat dissipation. The 70mm fan also help keeps hard drives at maximum performance temperature.

Features:

- Aluminum Frame and aluminum cover
- Interface: Supports SAS I/II/III & SATA I/II/III
- High performance transfer rate: up to 12Gb/s for SAS & SATA hard drives
- Plug & play, hot swappable
- LED for Power, HDD access, Fan sensor
- Power Control Switch
- 3-stage temperature alarm settings & reset switch for buzzer alarm
- 1 x 7cm cooling fan
- Patent products with advanced structure design
- Precise connection between the hard drive and the cage

Hardware Information: Front View

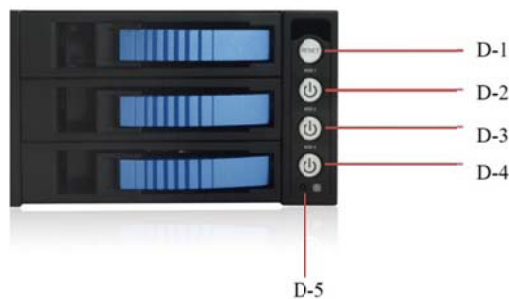

D-1: Reset Switch & Overheat LED. Power On: LED indicates Blue. Overheat (default 55° C): LED indicate Red and buzzer alarms. Press the Reset Switch (D-1) to stop the alarm for 3 minutes.

D-2 ~ D-4: Power Switch & HDD LED. Power On: LED indicates Blue. Purple color blinking for HDD access.

D-5: Fan sensor LED. Fan On: LED indicates Blue. Fan Off: LED indicates Red and buzzer alarms. Press the Reset Switch (D-1) to stop the alarm.

(If you want to switch off the "Alarm function", press the Reset Switch (D-1) for more than 6 seconds until 3 beeps comes out, then the "Alarm function" stopped.)