

E2M4

2U 4-Bay E-ATX Storage Server Rackmount Chassis



Features

- Front Access USB Connector
- miniSAS (SFF-8087) HDD Backplane
- Supports E-ATX Motherboard
- Power + Fan Failure + HDD LED Indicator
- 4 Hot-swappable 80mm Cooling Fans with Status Monitor
- Hard Drive Status Indicator for each Drive Bay
- Advance Thermal Cooling Design Optimizes Airflow
- Support 6.0Gb/s SAS/SATA Hard Drives


Specifications

Model Number	Expansion Slots
E2M4	7 (Low profile)
RoHS Compliance	Material of Main Chassis
YES	Heavy-duty SGCC Cold-rolled Steel
Form factor	Motherboard Size
2 U	12 x 13 (EATX, ATX, microATX)
Standard Drive Bays	Cooling Fan
3.5" Drives: 1 5.25" Drives: 2 Hotswap 3.5": 4	4x80mm
Hotswap HDD Type:	Dimensions (WxHxD)
3.5" SAS I/II & SATA I/II/III	Width 19.00" (482.6 mm) Height 3.50" (88.9 mm) Depth 27.00" (685.8 mm)
Indicators	
Power + Fan Failure + HDD LED	
Switches	
Power On/Off, Reset, Mute	

Front View



Inside View

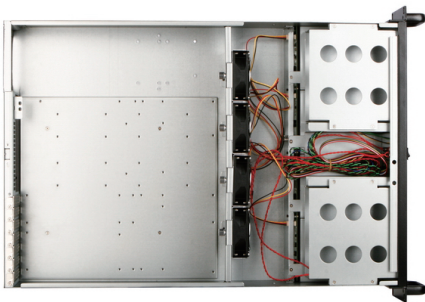


Rear View



We at iStarUSA Group offer OEM/ODM services for Industrial Power, Custom Power, Chassis, Cabinets, and Data Storage. Through our skilled metal bending, milling, and silk screening we can provide you with unique customizations that will make your product stand out from the rest. With iStarUSA Group's OEM/ODM Solutions you can be sure to receive one-of-a-kind products for your one-of-a-kind business.

Dimensions

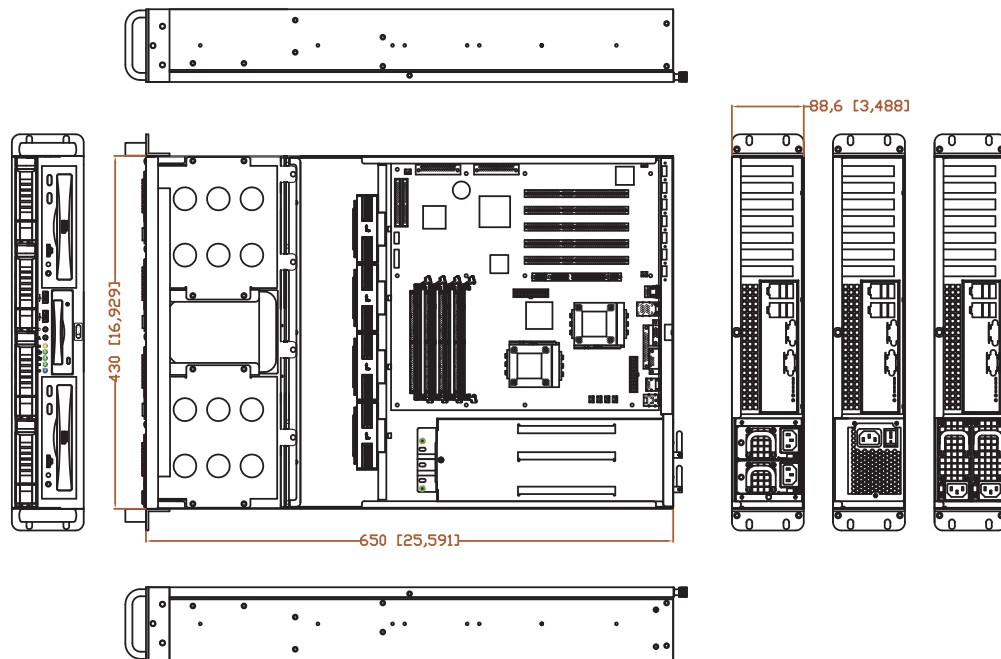

Ordering Information

Model	Description
E2M4	2U 4-Bay E-ATX Storage Server Rackmount Chassis

Compatible Power

PSU Model	Description
IS-2U35PD8	IS 2U 80PLUS 350W
IS-2U46PD8	IS 2U 80PLUS 460W
IX-1300R2UPD8	2U 1300W 80+ Platinum Redundant
IX-1600R2UPD8	2U 1600W 80+ Platinum Redundant
IX-750S2UPD8G	IS 1U 2U 750W 80+ Gold Redundant500W

Optional Accessories

Category	Model
Drive Cage	BPN Trayless Drive Cage Series BPU Tray Drive Cage Series
Sliding Rail Kit	TC-RAIL Series Sliding Rail Kit