
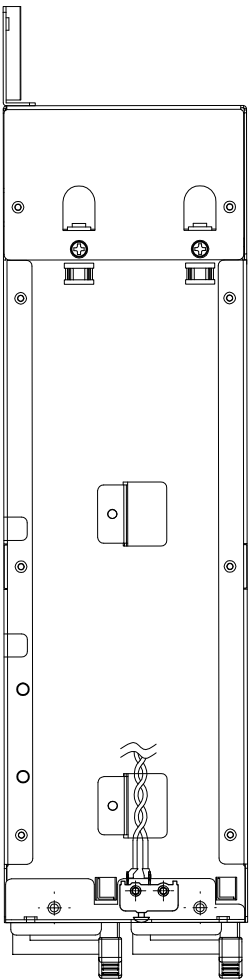
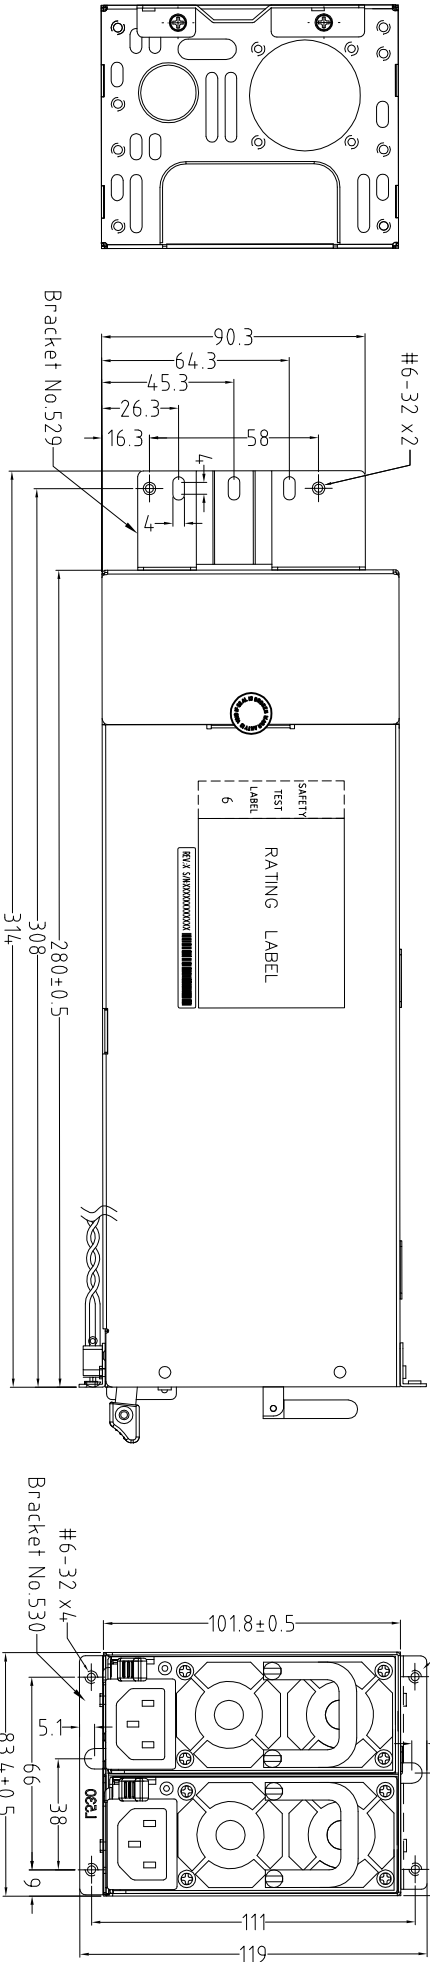


Rev.	Revision note	Date	Drawing By	Check By	Approved By
A	NEW DRAWING ISSUE	09/15/15	Mindy		

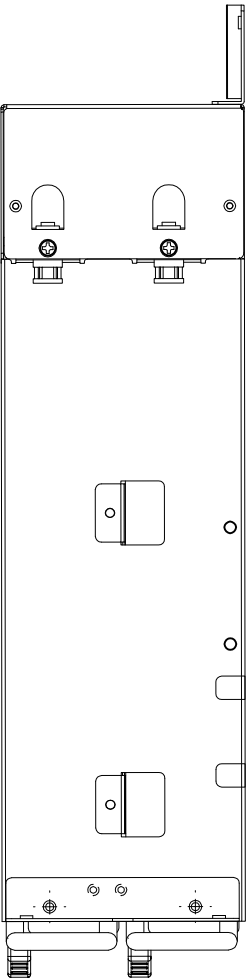

支 架 階 層	
鎖 附	附 件
V	

MODEL IX-750S2UPD8G		NAME Outline Dimension IX-750S2UPD8G		 TM Powered by IstarUSA Group			
NOTES		MATERIAL					
TOLERANCE UNLESS OTHERWISE MARKED							
GENERAL TOLERANCE		FINISH					
LENGTH							
0~30mm		±0.1mm					
TOLERANCE							
30~70mm		±0.15mm					
70~120mm		±0.2mm					
OVER 125mm		±0.25mm					
		MANUFACTURE NUMBER					
				DRAWING NO.			
							
		UNIT		mm		SCALE	
		SHEET				1 of 1	






- NOTES:
- 1.Tolerances:±0.5mm
 - 2.DIM. of EFRPG2753-Z90-0D01X
 - 3.Wireharness: EFRPG2753-Z90-0L01X

Rev.	Revision note	Date	Drawing By	Check By	Approved By
A	NEW DRAWING ISSUE	09/15/15	Hannah		


ORANGE	+3.3V	16AWG	PIN 1	ORANGE/S.BROWN	+3.3V/3VS+	16/22AWG	PIN 13
ORANGE	+3.3V	16AWG		BLUE	-12V	18AWG	
BLACK/S.BLACK	GND/3VS-	18/22AWG		BLACK	GND	18AWG	
RED	+5V	18AWG		S.GREEN	PSON	22AWG	
BLACK	GND	18AWG		BLACK	GND	18AWG	
RED	+5V	18AWG		BLACK	GND	18AWG	
BLACK/S.BLACK	GND/VSENSE	18/22AWG		BLACK	GND	18AWG	
S.GRAY	PG	22AWG		N/C			
PURPLE	+5VSB	18AWG		RED	+5V	18AWG	
YELLOW	+12V	18AWG		RED/S.RED	+5V/3VS+	18/22AWG	
YELLOW/S.YELLOW	+12V/12VS+	18/22AWG		RED	+5V	18AWG	
ORANGE	+3.3V	16AWG		BLACK	GND	18AWG	

Printed "EPS 12V"

BLACK/S.BLACK	GND/12VS-	18/22AWG	PIN 1	YELLOW	+12V	18AWG	PIN 5
BLACK	GND	18AWG		YELLOW	+12V	18AWG	
BLACK	GND	18AWG		YELLOW	+12V	18AWG	
BLACK	GND	18AWG		YELLOW	+12V	18AWG	

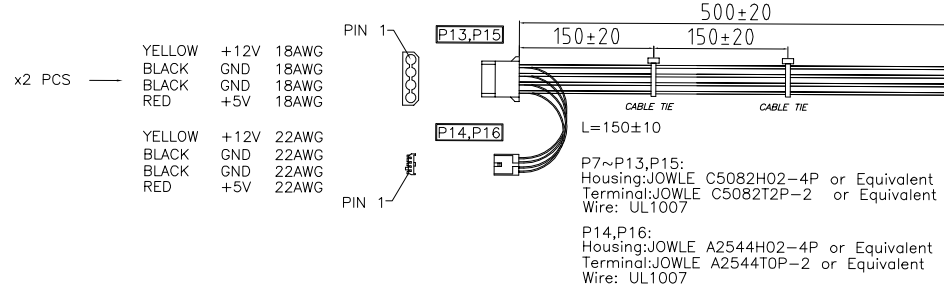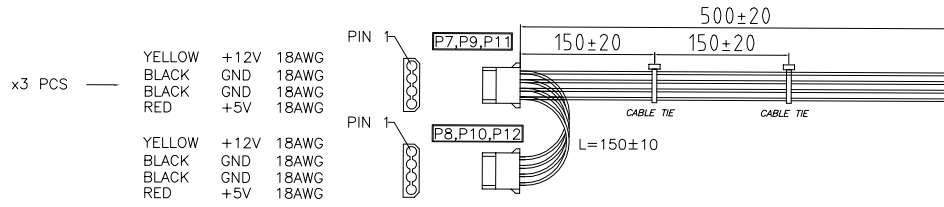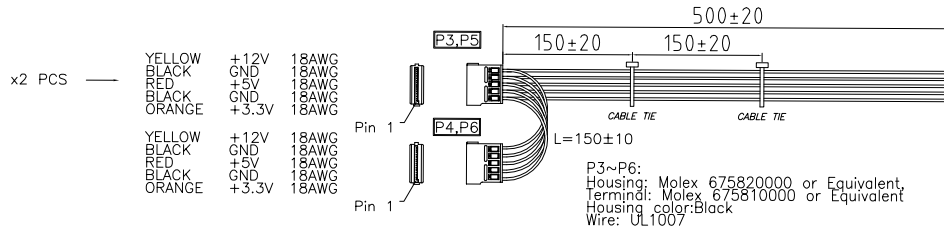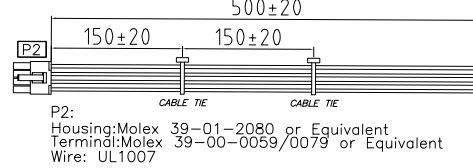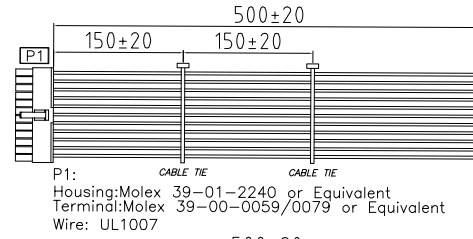


BLACK	GND	18AWG	PIN 1	YELLOW	+12V	18AWG	PIN 5
BLACK	GND	18AWG		YELLOW	+12V	18AWG	
BLACK	GND	18AWG		YELLOW	+12V	18AWG	
BLACK	GND	18AWG		YELLOW	+12V	18AWG	

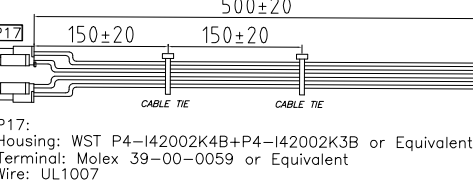


YELLOW	+12V	18AWG	PIN 1	BLACK	GND	18AWG	PIN 5
YELLOW	+12V	18AWG		BLACK	GND	18AWG	
YELLOW	+12V	18AWG		BLACK	GND	18AWG	


BLACK	GND	18AWG		BLACK	GND	18AWG	
-------	-----	-------	--	-------	-----	-------	--




TTL Signal (NORMAL HIGH)	BLACK	-	26AWG	PIN 1	
	ORANGE	+	26AWG		



PM-BUS	Green	SCL	24AWG	PIN 1	
	Gray	SDA	24AWG		
	RED	Power Fail	24AWG		
	Black	GND	24AWG		
	Orange	3.3RS	24AWG		

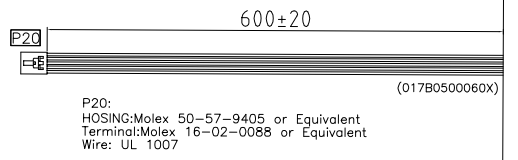

Alarm Reset BRACKET NO.530	BLACK	-	26AWG	PIN 1	
	WHITE	+	26AWG		

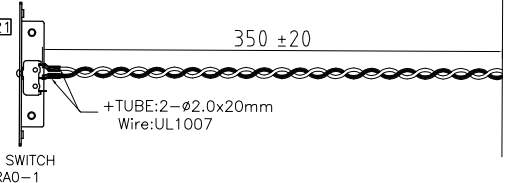

CUSTOMER APPROVED

NOTES:
1.Tolerances:±20mm
2.OD Drawing:

MODEL IX-750S2UPD8G		NAME Wireharness		 Powered by iSTARS™ A Group	
NOTES TOLERANCE TO BE FOLLOWED UNLESS OTHERWISE SPECIFIED LENGTH TOLERANCE 0-30mm(Included) ±0.15mm 30-70mm(Included) ±0.2mm 70-120mm(Included) ±0.25mm OVER 120mm ±0.3mm		MATERIAL Wireharness		 UNIT mm SCALE SHEET 1 of 1	
		FINISH			
		PART NO.			
		MANUFACTURE NUMBER		DRAWING NO.	